


MRT (RT) WORM GEAR REDUCERS

SELECTION TABLE

This is not a catalogue but a complement to standard rotor nl MRT (RT) Worm Reducers Catalogue

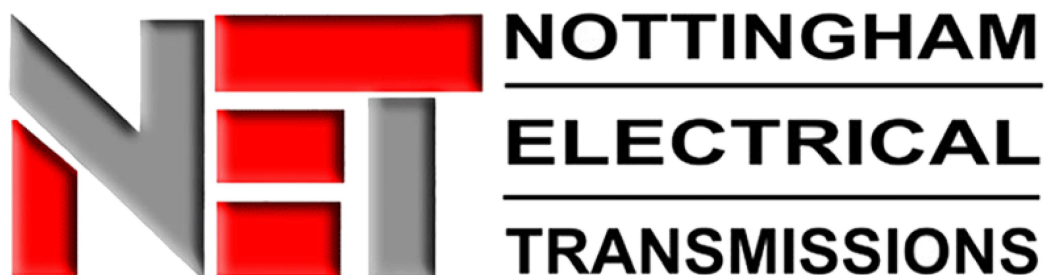

Nottingham Electrical Transmissions
Northern Court, Vernon Road, Basford, Nottingham. UK. NG6 0BJ
Tel: +44 (0)115 9753655 Fax: +44 (0)115 9770366
email: info@net-eng.co.uk <http://www.net-eng.co.uk>

							STANDARD		OPTIONAL			
OUTPUT	OUTPUT SPEED	SERVICE FACTOR	OUTPUT TORQUE	GEARBOX SIZE	RATIO i	MOTOR SIZE-POLES	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE
0.09 kW	9 rpm	1.3	47 Nm	MRT 50	100	63-6p	B14B	F50L	B14A	F50S		
0.09 kW	11 rpm	1	34 Nm	MRT 40	80	63-6p	B14A	F40S	B14B	F40L		
0.09 kW	11 rpm	1.5	42 Nm	MRT 50	80	63-6p	B14B	F50L	B14A	F50S		
0.09 kW	13 rpm	1.1	33 Nm	MRT 40	70	63-6p	B14A	F40S	B14B	F40L		
0.09 kW	13 rpm	1.8	38 Nm	MRT 50	70	63-6p	B14B	F50L	B14A	F50S		
0.09 kW	15 rpm	1.2	32 Nm	MRT 40	60	63-6p	B14A	F40S	B14B	F40L		
0.09 kW	15 rpm	2.2	34 Nm	MRT 50	60	63-6p	B14B	F50L	B14A	F50S		
0.09 kW	18 rpm	1.5	29 Nm	MRT 40	50	63-6p	B14A	F40S	B14B	F40L		
0.09 kW	18 rpm	2.4	31 Nm	MRT 50	50	63-6p	B14B	F50L	B14A	F50S		
0.09 kW	23 rpm	1.9	24 Nm	MRT 40	40	63-6p	B14A	F40S	B14B	F40L		
0.09 kW	28 rpm	1	17 Nm	MRT 30	50	56-4p	B14A	F30S				
0.09 kW	30 rpm	1.2	18 Nm	MRT 30	30	63-6p	B14A	F30M				
0.09 kW	30 rpm	2.4	20 Nm	MRT 40	30	63-6p	B14A	F40S	B14B	F40L		
0.09 kW	35 rpm	1.3	14 Nm	MRT 30	40	56-4p	B14A	F30S				
0.09 kW	36 rpm	1.3	16 Nm	MRT 30	25	63-6p	B14A	F30M				
0.09 kW	36 rpm	2.2	18 Nm	MRT 40	25	63-6p	B14A	F40S	B14B	F40L		
0.09 kW	40 rpm	1.2	10 Nm	MRT 30	70	56-2p	B14A	F30S				
0.09 kW	45 rpm	1.3	14 Nm	MRT 30	20	63-6p	B14A	F30M				
0.09 kW	45 rpm	2.9	15 Nm	MRT 40	20	63-6p	B14A	F40S	B14B	F40L		
0.09 kW	47 rpm	1.7	12 Nm	MRT 30	30	56-4p	B14A	F30S				
0.09 kW	47 rpm	1.6	8 Nm	MRT 30	60	56-2p	B14A	F30S				
0.09 kW	56 rpm	1.9	10 Nm	MRT 30	25	56-4p	B14A	F30S				
0.09 kW	56 rpm	1.7	8 Nm	MRT 30	50	56-2p	B14A	F30S				
0.09 kW	60 rpm	1.7	11 Nm	MRT 30	15	63-6p	B14A	F30M				
0.09 kW	60 rpm	3.7	12 Nm	MRT 40	15	63-6p	B14A	F40S	B14B	F40L		
0.09 kW	70 rpm	1.8	9 Nm	MRT 30	20	56-4p	B14A	F30S				
0.09 kW	70 rpm	2.2	7 Nm	MRT 30	40	56-2p	B14A	F30S				
0.09 kW	72 rpm	2.1	9 Nm	MRT 30	12.5	63-6p	B14A	F30M				
0.09 kW	72 rpm	4.1	10 Nm	MRT 40	12.5	63-6p	B14A	F40S	B14B	F40L		
0.09 kW	90 rpm	2.3	8 Nm	MRT 30	10	63-6p	B14A	F30M				
0.09 kW	93 rpm	2.4	7 Nm	MRT 30	15	56-4p	B14A	F30S				
0.09 kW	93 rpm	3	6 Nm	MRT 30	30	56-2p	B14A	F30S				
0.09 kW	112 rpm	2.8	6 Nm	MRT 30	12.5	56-4p	B14A	F30S				
0.09 kW	112 rpm	3.2	5 Nm	MRT 30	25	56-2p	B14A	F30S				
0.09 kW	120 rpm	3	6 Nm	MRT 30	7.5	63-6p	B14A	F30M				
0.09 kW	140 rpm	3.4	5 Nm	MRT 30	10	56-4p	B14A	F30S				
0.09 kW	140 rpm	2.8	5 Nm	MRT 30	20	56-2p	B14A	F30S				
0.09 kW	180 rpm	4.1	4 Nm	MRT 30	5	63-6p	B14A	F30M				
0.09 kW	187 rpm	4	4 Nm	MRT 30	7.5	56-4p	B14A	F30S				
0.09 kW	187 rpm	3.5	4 Nm	MRT 30	15	56-2p	B14A	F30S				
0.09 kW	224 rpm	4.1	3 Nm	MRT 30	12.5	56-2p	B14A	F30S				
0.09 kW	280 rpm	4.1	3 Nm	MRT 30	5	56-4p	B14A	F30S				
0.12 kW	14 rpm	1.3	42 Nm	MRT 50	100	63-4p	B14B	F50L	B14A	F50S		
0.12 kW	18 rpm	1	30 Nm	MRT 40	80	63-4p	B14A	F40S	B14B	F40L		
0.12 kW	18 rpm	1.6	37 Nm	MRT 50	80	63-4p	B14B	F50L	B14A	F50S		
0.12 kW	20 rpm	1.1	29 Nm	MRT 40	70	63-4p	B14A	F40S	B14B	F40L		
0.12 kW	20 rpm	1.9	33 Nm	MRT 50	70	63-4p	B14B	F50L	B14A	F50S		
0.12 kW	23 rpm	1.2	28 Nm	MRT 40	60	63-4p	B14A	F40S	B14B	F40L		
0.12 kW	23 rpm	2.3	29 Nm	MRT 50	60	63-4p	B14B	F50L	B14A	F50S		
0.12 kW	28 rpm	1.5	25 Nm	MRT 40	50	63-4p	B14A	F40S	B14B	F40L		
0.12 kW	28 rpm	2.5	27 Nm	MRT 50	50	63-4p	B14B	F50L	B14A	F50S		
0.12 kW	35 rpm	1	19 Nm	MRT 30	40	63-4p	B14A	F30M				
0.12 kW	35 rpm	1.9	21 Nm	MRT 40	40	63-4p	B14A	F40S	B14B	F40L		
0.12 kW	35 rpm	3.2	24 Nm	MRT 50	40	63-4p	B14B	F50L	B14A	F50S		
0.12 kW	47 rpm	1.4	15 Nm	MRT 30	30	63-4p	B14A	F30M				
0.12 kW	47 rpm	2.5	17 Nm	MRT 40	30	63-4p	B14A	F40S	B14B	F40L		
0.12 kW	47 rpm	4.1	18 Nm	MRT 50	30	63-4p	B14B	F50L	B14A	F50S		
0.12 kW	47 rpm	1.1	11 Nm	MRT 30	60	56-2p	B14A	F30S				
0.12 kW	56 rpm	1.3	14 Nm	MRT 30	25	63-4p	B14A	F30M				
0.12 kW	56 rpm	2.2	16 Nm	MRT 40	25	63-4p	B14A	F40S	B14B	F40L		
0.12 kW	56 rpm	4	16 Nm	MRT 50	25	63-4p	B14B	F50L	B14A	F50S		
0.12 kW	56 rpm	1.2	11 Nm	MRT 30	50	56-2p	B14A	F30S				
0.12 kW	70 rpm	1.4	12 Nm	MRT 30	20	63-4p	B14A	F30M				
0.12 kW	70 rpm	3	13 Nm	MRT 40	20	63-4p	B14A	F40S	B14B	F40L		
0.12 kW	70 rpm	1.6	10 Nm	MRT 30	40	56-2p	B14A	F30S				
0.12 kW	93 rpm	1.7	10 Nm	MRT 30	15	63-4p	B14A	F30M				
0.12 kW	93 rpm	4	10 Nm	MRT 40	15	63-4p	B14A	F40S	B14B	F40L		
0.12 kW	93 rpm	2.2	8 Nm	MRT 30	30	56-2p	B14A	F30S				
0.12 kW	112 rpm	2.1	8 Nm	MRT 30	12.5	63-4p	B14A	F30M				
0.12 kW	112 rpm	4.1	9 Nm	MRT 40	12.5	63-4p	B14A	F40S	B14B	F40L		
0.12 kW	112 rpm	2.2	7 Nm	MRT 30	25	56-2p	B14A	F30S				
0.12 kW	140 rpm	2.4	7 Nm	MRT 30	10	63-4p	B14A	F30M				
0.12 kW	140 rpm	4.1	7 Nm	MRT 40	10	63-4p	B14A	F40S	B14B	F40L		
0.12 kW	140 rpm	2.3	6 Nm	MRT 30	20	56-2p	B14A	F30S				
0.12 kW	187 rpm	3.2	5 Nm	MRT 30	7.5	63-4p	B14A	F30M				
0.12 kW	187 rpm	4.1	5 Nm	MRT 40	7.5	63-4p	B14A	F40S	B14B	F40L		
0.12 kW	224 rpm	3.5	4 Nm	MRT 30	12.5	56-2p	B14A	F30S				
0.12 kW	280 rpm	4	4 Nm	MRT 30	5	63-4p	B14A	F30M				
0.12 kW	280 rpm	4.1	4 Nm	MRT 40	5	63-4p	B14A	F40S	B14B	F40L		
0.18 kW	9 rpm	1	103 Nm	MRT 60	100	71-6p	B5	F60L	B14B	F60M		
0.18 kW	9 rpm	1.6	86 Nm	MRT 70	100	71-6p	B5	F70L	B14B	F70M		
0.18 kW	11 rpm	1.2	90 Nm	MRT 60	80	71-6p	B5	F60L	B14B	F60M		

							STANDARD		OPTIONAL			
OUTPUT	OUTPUT SPEED	SERVICE FACTOR	OUTPUT TORQUE	GEARBOX SIZE	RATIO i	MOTOR SIZE-POLES	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE
0.18 kW	11 rpm	1.8	78 Nm	MRT 70	80	71-6p	B5	F70L	B14B	F70M		
0.18 kW	13 rpm	1.5	80 Nm	MRT 60	70	71-6p	B5	F60L	B14B	F60M		
0.18 kW	13 rpm	2.2	75 Nm	MRT 70	70	71-6p	B5	F70L	B14B	F70M		
0.18 kW	15 rpm	1.1	68 Nm	MRT 50	60	71-6p	B14A	F50M				
0.18 kW	15 rpm	1.8	70 Nm	MRT 60	60	71-6p	B5	F60L	B14B	F60M		
0.18 kW	15 rpm	2.6	71 Nm	MRT 70	60	71-6p	B5	F70L	B14B	F70M		
0.18 kW	18 rpm	1	56 Nm	MRT 50	80	63-4p	B14B	F50L	B14A	F50S		
0.18 kW	18 rpm	1.2	61 Nm	MRT 50	50	71-6p	B14A	F50M				
0.18 kW	18 rpm	2.2	60 Nm	MRT 60	50	71-6p	B5	F60L	B14B	F60M		
0.18 kW	18 rpm	3	66 Nm	MRT 70	50	71-6p	B5	F70L	B14B	F70M		
0.18 kW	20 rpm	1.2	50 Nm	MRT 50	70	63-4p	B14B	F50L	B14A	F50S		
0.18 kW	23 rpm	1.5	44 Nm	MRT 50	60	63-4p	B14B	F50L	B14A	F50S		
0.18 kW	23 rpm	1.5	54 Nm	MRT 50	40	71-6p	B14A	F50M				
0.18 kW	23 rpm	2.7	53 Nm	MRT 60	40	71-6p	B5	F60L	B14B	F60M		
0.18 kW	23 rpm	3.6	55 Nm	MRT 70	40	71-6p	B5	F70L	B14B	F70M		
0.18 kW	28 rpm	1	38 Nm	MRT 40	50	63-4p	B14A	F40S	B14B	F40L		
0.18 kW	28 rpm	1.7	40 Nm	MRT 50	50	63-4p	B14B	F50L	B14A	F50S		
0.18 kW	28 rpm	1.4	33 Nm	MRT 50	100	63-2p	B14B	F50L	B14A	F50S		
0.18 kW	30 rpm	1.2	40 Nm	MRT 40	30	71-6p	B14A	F40M				
0.18 kW	30 rpm	2.1	42 Nm	MRT 50	30	71-6p	B14A	F50M				
0.18 kW	30 rpm	3.6	43 Nm	MRT 60	30	71-6p	B5	F60L	B14B	F60M		
0.18 kW	35 rpm	1.2	32 Nm	MRT 40	40	63-4p	B14A	F40S	B14B	F40L		
0.18 kW	35 rpm	2.2	35 Nm	MRT 50	40	63-4p	B14B	F50L	B14A	F50S		
0.18 kW	35 rpm	1	24 Nm	MRT 40	80	63-2p	B14A	F40S	B14B	F40L		
0.18 kW	35 rpm	1.7	29 Nm	MRT 50	80	63-2p	B14B	F50L	B14A	F50S		
0.18 kW	36 rpm	1.1	36 Nm	MRT 40	25	71-6p	B14A	F40M				
0.18 kW	36 rpm	1.9	37 Nm	MRT 50	25	71-6p	B14A	F50M				
0.18 kW	40 rpm	1.3	22 Nm	MRT 40	70	63-2p	B14A	F40S	B14B	F40L		
0.18 kW	40 rpm	2.1	25 Nm	MRT 50	70	63-2p	B14B	F50L	B14A	F50S		
0.18 kW	45 rpm	1.4	30 Nm	MRT 40	20	71-6p	B14A	F40M				
0.18 kW	45 rpm	2.6	31 Nm	MRT 50	20	71-6p	B14A	F50M				
0.18 kW	45 rpm	4	31 Nm	MRT 60	20	71-6p	B5	F60L	B14B	F60M		
0.18 kW	47 rpm	1.6	26 Nm	MRT 40	30	63-4p	B14A	F40S	B14B	F40L		
0.18 kW	47 rpm	2.9	27 Nm	MRT 50	30	63-4p	B14B	F50L	B14A	F50S		
0.18 kW	47 rpm	1.4	21 Nm	MRT 40	60	63-2p	B14A	F40S	B14B	F40L		
0.18 kW	47 rpm	2.5	22 Nm	MRT 50	60	63-2p	B14B	F50L	B14A	F50S		
0.18 kW	56 rpm	1.5	24 Nm	MRT 40	25	63-4p	B14A	F40S	B14B	F40L		
0.18 kW	56 rpm	2.6	24 Nm	MRT 50	25	63-4p	B14B	F50L	B14A	F50S		
0.18 kW	56 rpm	1.7	19 Nm	MRT 40	50	63-2p	B14A	F40S	B14B	F40L		
0.18 kW	56 rpm	2.9	20 Nm	MRT 50	50	63-2p	B14B	F50L	B14A	F50S		
0.18 kW	60 rpm	1.9	23 Nm	MRT 40	15	71-6p	B14A	F40M				
0.18 kW	60 rpm	3.5	24 Nm	MRT 50	15	71-6p	B14A	F50M				
0.18 kW	70 rpm	2	19 Nm	MRT 40	20	63-4p	B14A	F40S	B14B	F40L		
0.18 kW	70 rpm	3.7	20 Nm	MRT 50	20	63-4p	B14B	F50L	B14A	F50S		
0.18 kW	70 rpm	1.1	14 Nm	MRT 30	40	63-2p	B14A	F30M				
0.18 kW	70 rpm	2.1	16 Nm	MRT 40	40	63-2p	B14A	F40S	B14B	F40L		
0.18 kW	70 rpm	3.6	18 Nm	MRT 50	40	63-2p	B14B	F50L	B14A	F50S		
0.18 kW	72 rpm	2.2	20 Nm	MRT 40	12.5	71-6p	B14A	F40M				
0.18 kW	72 rpm	3.8	20 Nm	MRT 50	12.5	71-6p	B14A	F50M				
0.18 kW	90 rpm	2.8	16 Nm	MRT 40	10	71-6p	B14A	F40M				
0.18 kW	90 rpm	4.1	16 Nm	MRT 50	10	71-6p	B14A	F50M				
0.18 kW	93 rpm	1.2	14 Nm	MRT 30	15	63-4p	B14A	F30M				
0.18 kW	93 rpm	2.6	15 Nm	MRT 40	15	63-4p	B14A	F40S	B14B	F40L		
0.18 kW	93 rpm	4.1	16 Nm	MRT 50	15	63-4p	B14B	F50L	B14A	F50S		
0.18 kW	93 rpm	1.5	12 Nm	MRT 30	30	63-2p	B14A	F30M				
0.18 kW	93 rpm	2.7	13 Nm	MRT 40	30	63-2p	B14A	F40S	B14B	F40L		
0.18 kW	93 rpm	4.1	14 Nm	MRT 50	30	63-2p	B14B	F50L	B14A	F50S		
0.18 kW	112 rpm	1.4	12 Nm	MRT 30	12.5	63-4p	B14A	F30M				
0.18 kW	112 rpm	3	13 Nm	MRT 40	12.5	63-4p	B14A	F40S	B14B	F40L		
0.18 kW	112 rpm	1.6	10 Nm	MRT 30	25	63-2p	B14A	F30M				
0.18 kW	112 rpm	2.5	12 Nm	MRT 40	25	63-2p	B14A	F40S	B14B	F40L		
0.18 kW	112 rpm	4.5	12 Nm	MRT 50	25	63-2p	B14B	F50L	B14A	F50S		
0.18 kW	120 rpm	3.4	12 Nm	MRT 40	7.5	71-6p	B14A	F40S				
0.18 kW	140 rpm	1.7	10 Nm	MRT 30	10	63-4p	B14A	F30M				
0.18 kW	140 rpm	4.1	10 Nm	MRT 40	10	63-4p	B14A	F40S	B14B	F40L		
0.18 kW	140 rpm	1.5	9 Nm	MRT 30	20	63-2p	B14A	F30M				
0.18 kW	140 rpm	3.3	10 Nm	MRT 40	20	63-2p	B14A	F40S	B14B	F40L		
0.18 kW	180 rpm	4.1	8 Nm	MRT 40	5	71-6p	B14A	F40M				
0.18 kW	187 rpm	2	8 Nm	MRT 30	7.5	63-4p	B14A	F30M				
0.18 kW	187 rpm	4.1	8 Nm	MRT 40	7.5	63-4p	B14A	F40S	B14B	F40L		
0.18 kW	187 rpm	2	7 Nm	MRT 30	15	63-2p	B14A	F30M				
0.18 kW	224 rpm	2.3	6 Nm	MRT 30	12.5	63-2p	B14A	F30M				
0.18 kW	224 rpm	4.1	7 Nm	MRT 40	12.5	63-2p	B14A	F40S	B14B	F40L		
0.18 kW	280 rpm	3.2	5 Nm	MRT 30	5	63-4p	B14A	F30M				
0.18 kW	280 rpm	4.1	5 Nm	MRT 40	5	63-4p	B14A	F40S	B14B	F40L		
0.18 kW	373 rpm	3.2	4 Nm	MRT 30	7.5	63-2p	B14A	F30M				
0.25 kW	9 rpm	1.2	119 Nm	MRT 70	100	71-6p	B5	F70L	B14B	F70M		
0.25 kW	11 rpm	1.3	108 Nm	MRT 70	80	71-6p	B5	F70L	B14B	F70M		
0.25 kW	13 rpm	1	111 Nm	MRT 60	70	71-6p	B5	F60L	B14B	F60M		
0.25 kW	13 rpm	1.6	104 Nm	MRT 70	70	71-6p	B5	F70L	B14B	F70M		
0.25 kW	14 rpm	1	96 Nm	MRT 60	100	71-4p	B5	F60L	B14B	F60M		
0.25 kW	14 rpm	1.6	80 Nm	MRT 70	100	71-4p	B5	F70L	B14B	F70M		

							STANDARD		OPTIONAL			
OUTPUT	OUTPUT SPEED	SERVICE FACTOR	OUTPUT TORQUE	GEARBOX SIZE	RATIO i	MOTOR SIZE-POLES	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE
0.25 kW	15 rpm	1.3	97 Nm	MRT 60	60	71-6p	B5	F60L	B14B	F60M		
0.25 kW	15 rpm	1.8	99 Nm	MRT 70	60	71-6p	B5	F70L	B14B	F70M		
0.25 kW	18 rpm	1.2	83 Nm	MRT 60	80	71-4p	B5	F60L	B14B	F60M		
0.25 kW	18 rpm	1.8	72 Nm	MRT 70	80	71-4p	B5	F70L	B14B	F70M		
0.25 kW	18 rpm	1.6	84 Nm	MRT 60	50	71-6p	B5	F60L	B14B	F60M		
0.25 kW	18 rpm	2.1	92 Nm	MRT 70	50	71-6p	B5	F70L	B14B	F70M		
0.25 kW	20 rpm	1.4	73 Nm	MRT 60	70	71-4p	B5	F60L	B14B	F60M		
0.25 kW	20 rpm	2.2	68 Nm	MRT 70	70	71-4p	B5	F70L	B14B	F70M		
0.25 kW	23 rpm	1	61 Nm	MRT 50	60	71-4p	B14A	F50M	B14B	F60M		
0.25 kW	23 rpm	1.8	63 Nm	MRT 60	60	71-4p	B5	F60L	B14B	F60M		
0.25 kW	23 rpm	2.5	64 Nm	MRT 70	60	71-4p	B5	F70L	B14B	F70M		
0.25 kW	23 rpm	1.1	75 Nm	MRT 50	40	71-6p	B14A	F50M				
0.25 kW	23 rpm	1.9	74 Nm	MRT 60	40	71-6p	B5	F60L	B14B	F60M		
0.25 kW	23 rpm	2.6	76 Nm	MRT 70	40	71-6p	B5	F70L	B14B	F70M		
0.25 kW	28 rpm	1.2	55 Nm	MRT 50	50	71-4p	B14A	F50M				
0.25 kW	28 rpm	2.2	55 Nm	MRT 60	50	71-4p	B5	F60L	B14B	F60M		
0.25 kW	28 rpm	3	60 Nm	MRT 70	50	71-4p	B5	F70L	B14B	F70M		
0.25 kW	28 rpm	1	45 Nm	MRT 50	100	63-2p	B14B	F50L	B14A	F50S		
0.25 kW	30 rpm	1.5	58 Nm	MRT 50	30	71-6p	B14A	F50M				
0.25 kW	30 rpm	2.5	60 Nm	MRT 60	30	71-6p	B5	F60L	B14B	F60M		
0.25 kW	30 rpm	3.6	60 Nm	MRT 70	30	71-6p	B5	F70L	B14B	F70M		
0.25 kW	35 rpm	1.5	49 Nm	MRT 50	40	71-4p	B14A	F50M				
0.25 kW	35 rpm	2.7	48 Nm	MRT 60	40	71-4p	B5	F60L	B14B	F60M		
0.25 kW	35 rpm	3.5	50 Nm	MRT 70	40	71-4p	B5	F70L	B14B	F70M		
0.25 kW	35 rpm	1.2	40 Nm	MRT 50	80	63-2p	B14B	F50L	B14A	F50S		
0.25 kW	36 rpm	1.3	51 Nm	MRT 50	25	71-6p	B14A	F50M				
0.25 kW	36 rpm	2.7	52 Nm	MRT 60	25	71-6p	B5	F60L	B14B	F60M		
0.25 kW	36 rpm	3.3	54 Nm	MRT 70	25	71-6p	B5	F70L	B14B	F70M		
0.25 kW	40 rpm	1.5	35 Nm	MRT 50	70	63-2p	B14B	F50L	B14A	F50S		
0.25 kW	45 rpm	1	41 Nm	MRT 40	20	71-6p	B14A	F40M				
0.25 kW	45 rpm	1.8	44 Nm	MRT 50	20	71-6p	B14A	F50M				
0.25 kW	45 rpm	2.8	44 Nm	MRT 60	20	71-6p	B5	F60L	B14B	F60M		
0.25 kW	45 rpm	4.1	45 Nm	MRT 70	20	71-6p	B5	F70L	B14B	F70M		
0.25 kW	47 rpm	1.1	36 Nm	MRT 40	30	71-4p	B14A	F40M				
0.25 kW	47 rpm	2.1	38 Nm	MRT 50	30	71-4p	B14A	F50M				
0.25 kW	47 rpm	3.5	39 Nm	MRT 60	30	71-4p	B5	F60L	B14B	F60M		
0.25 kW	47 rpm	1	30 Nm	MRT 40	60	63-2p	B14A	F40S	B14B	F40L		
0.25 kW	47 rpm	1.8	31 Nm	MRT 50	60	63-2p	B14B	F50L	B14A	F50S		
0.25 kW	56 rpm	1	33 Nm	MRT 40	25	71-4p	B14A	F40M				
0.25 kW	56 rpm	1.9	33 Nm	MRT 50	25	71-4p	B14A	F50M				
0.25 kW	56 rpm	3.7	34 Nm	MRT 60	25	71-4p	B5	F60L	B14B	F60M		
0.25 kW	56 rpm	1.2	27 Nm	MRT 40	50	63-2p	B14A	F40S	B14B	F40L		
0.25 kW	56 rpm	2	28 Nm	MRT 50	50	63-2p	B14B	F50L	B14A	F50S		
0.25 kW	60 rpm	1.3	33 Nm	MRT 40	15	71-6p	B14A	F40M				
0.25 kW	60 rpm	2.5	33 Nm	MRT 50	15	71-6p	B14A	F50M				
0.25 kW	60 rpm	3.9	34 Nm	MRT 60	15	71-6p	B5	F60L	B14B	F60M		
0.25 kW	70 rpm	1.4	27 Nm	MRT 40	20	71-4p	B14A	F40M				
0.25 kW	70 rpm	2.6	28 Nm	MRT 50	20	71-4p	B14A	F50M				
0.25 kW	70 rpm	4	28 Nm	MRT 60	20	71-4p	B5	F60L	B14B	F60M		
0.25 kW	70 rpm	1.4	23 Nm	MRT 40	40	63-2p	B14A	F40S	B14B	F40L		
0.25 kW	70 rpm	2.6	25 Nm	MRT 50	40	63-2p	B14B	F50L	B14A	F50S		
0.25 kW	72 rpm	1.5	28 Nm	MRT 40	12.5	71-6p	B14A	F40M				
0.25 kW	72 rpm	2.7	28 Nm	MRT 50	12.5	71-6p	B14A	F50M				
0.25 kW	72 rpm	4.1	29 Nm	MRT 60	12.5	71-6p	B5	F60L	B14B	F60M		
0.25 kW	90 rpm	2	22 Nm	MRT 40	10	71-6p	B14A	F40M				
0.25 kW	90 rpm	3.4	23 Nm	MRT 50	10	71-6p	B14A	F50M				
0.25 kW	93 rpm	1.9	21 Nm	MRT 40	15	71-4p	B14A	F40M				
0.25 kW	93 rpm	3.4	22 Nm	MRT 50	15	71-4p	B14A	F50M				
0.25 kW	93 rpm	1.1	16 Nm	MRT 30	30	63-2p	B14A	F30M				
0.25 kW	93 rpm	2	18 Nm	MRT 40	30	63-2p	B14A	F40S	B14B	F40L		
0.25 kW	93 rpm	3.5	19 Nm	MRT 50	30	63-2p	B14B	F50L	B14A	F50S		
0.25 kW	112 rpm	2.1	18 Nm	MRT 40	12.5	71-4p	B14A	F40M				
0.25 kW	112 rpm	3.7	18 Nm	MRT 50	12.5	71-4p	B14A	F50M				
0.25 kW	112 rpm	1.1	14 Nm	MRT 30	25	63-2p	B14A	F30M				
0.25 kW	112 rpm	1.7	17 Nm	MRT 40	25	63-2p	B14A	F40S	B14B	F40L		
0.25 kW	112 rpm	3.1	17 Nm	MRT 50	25	63-2p	B14B	F50L	B14A	F50S		
0.25 kW	120 rpm	2.4	17 Nm	MRT 40	7.5	71-6p	B14A	F40M				
0.25 kW	120 rpm	4.1	17 Nm	MRT 50	7.5	71-6p	B14A	F50M				
0.25 kW	140 rpm	2.9	14 Nm	MRT 40	10	71-4p	B14A	F40M				
0.25 kW	140 rpm	4.1	15 Nm	MRT 50	10	71-4p	B14A	F50M				
0.25 kW	140 rpm	1	13 Nm	MRT 30	20	63-2p	B14A	F30M				
0.25 kW	140 rpm	2.3	14 Nm	MRT 40	20	63-2p	B14A	F40S	B14B	F40L		
0.25 kW	180 rpm	3.6	11 Nm	MRT 40	5	71-6p	B14A	F40M				
0.25 kW	187 rpm	3.3	11 Nm	MRT 40	7.5	71-4p	B14A	F40M				
0.25 kW	187 rpm	4.1	11 Nm	MRT 50	7.5	71-4p	B14A	F50M				
0.25 kW	187 rpm	1.4	10 Nm	MRT 30	15	63-2p	B14A	F30M				
0.25 kW	187 rpm	3	11 Nm	MRT 40	15	63-2p	B14A	F40S	B14B	F40L		
0.25 kW	224 rpm	1.7	8 Nm	MRT 30	12.5	63-2p	B14A	F30M				
0.25 kW	224 rpm	3.6	9 Nm	MRT 40	12.5	63-2p	B14A	F40S	B14B	F40L		
0.25 kW	280 rpm	4.1	7 Nm	MRT 40	5	71-4p	B14A	F40M				
0.25 kW	290 rpm	2	7 Nm	MRT 30	10	63-2p	B14A	F30M				
0.25 kW	373 rpm	2.6	5 Nm	MRT 30	7.5	63-2p	B14A	F30M				

							STANDARD		OPTIONAL			
OUTPUT	OUTPUT SPEED	SERVICE FACTOR	OUTPUT TORQUE	GEARBOX SIZE	RATIO i	MOTOR SIZE-POLES	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE
0.37 kW	9 rpm	1	208 Nm	MRT 80	100	80-6p	B14B	F80M	B5	F80L		
0.37 kW	9 rpm	1.9	196 Nm	MRT 100	100	80-6p	B5	F100M				
0.37 kW	11 rpm	1.3	173 Nm	MRT 80	80	80-6p	B14B	F80M	B5	F80L		
0.37 kW	11 rpm	2.1	195 Nm	MRT 100	80	80-6p	B5	F100M				
0.37 kW	13 rpm	1.1	154 Nm	MRT 70	70	80-6p	B14B	F70L	B14A	F70S		
0.37 kW	13 rpm	1.5	159 Nm	MRT 80	70	80-6p	B14B	F80M	B5	F80L		
0.37 kW	14 rpm	1	119 Nm	MRT 70	100	71-4p	B5	F70L	B14B	F70M		
0.37 kW	15 rpm	1.2	146 Nm	MRT 70	60	80-6p	B14B	F70L	B14A	F70S		
0.37 kW	15 rpm	1.6	148 Nm	MRT 80	60	80-6p	B14B	F80M	B5	F80L		
0.37 kW	15 rpm	3.3	148 Nm	MRT 100	60	80-6p	B5	F100M				
0.37 kW	18 rpm	1.2	107 Nm	MRT 70	80	71-4p	B5	F70L	B14B	F70M		
0.37 kW	18 rpm	1	124 Nm	MRT 60	50	80-6p	B14B	F60L	B14A	F60S		
0.37 kW	18 rpm	1.4	135 Nm	MRT 70	50	80-6p	B14B	F70L	B14A	F70S		
0.37 kW	18 rpm	2	137 Nm	MRT 80	50	80-6p	B14B	F80M	B5	F80L		
0.37 kW	18 rpm	3.8	133 Nm	MRT 100	50	80-6p	B5	F100M				
0.37 kW	20 rpm	1	108 Nm	MRT 60	70	71-4p	B5	F60L	B14B	F60M		
0.37 kW	20 rpm	1.5	101 Nm	MRT 70	70	71-4p	B5	F70L	B14B	F70M		
0.37 kW	23 rpm	1.2	94 Nm	MRT 60	60	71-4p	B5	F60L	B14B	F60M		
0.37 kW	23 rpm	1.7	95 Nm	MRT 70	60	71-4p	B5	F70L	B14B	F70M		
0.37 kW	23 rpm	1.3	110 Nm	MRT 60	40	80-6p	B14B	F60L	B14A	F60S		
0.37 kW	23 rpm	1.7	113 Nm	MRT 70	40	80-6p	B14B	F70L	B14A	F70S		
0.37 kW	23 rpm	2.6	113 Nm	MRT 80	40	80-6p	B14B	F80M	B5	F80L		
0.37 kW	23 rpm	4.1	113 Nm	MRT 100	40	80-6p	B5	F100M				
0.37 kW	28 rpm	1.5	81 Nm	MRT 60	50	71-4p	B5	F60L	B14B	F60M		
0.37 kW	28 rpm	2	88 Nm	MRT 70	50	71-4p	B5	F70L	B14B	F70M		
0.37 kW	28 rpm	1.1	73 Nm	MRT 60	100	71-2p	B5	F60L	B14B	F60M		
0.37 kW	28 rpm	1.7	62 Nm	MRT 70	100	71-2p	B5	F70L	B14B	F70M		
0.37 kW	30 rpm	1	86 Nm	MRT 50	30	80-6p	B14A	F50L				
0.37 kW	30 rpm	1.7	88 Nm	MRT 60	30	80-6p	B14B	F60L	B14A	F60S		
0.37 kW	30 rpm	2.4	90 Nm	MRT 70	30	80-6p	B14B	F70L	B14A	F70S		
0.37 kW	30 rpm	3.6	87 Nm	MRT 80	30	80-6p	B14B	F80M	B5	F80L		
0.37 kW	35 rpm	1	73 Nm	MRT 50	40	71-4p	B14A	F50M				
0.37 kW	35 rpm	1.8	72 Nm	MRT 60	40	71-4p	B5	F60L	B14B	F60M		
0.37 kW	35 rpm	2.3	74 Nm	MRT 70	40	71-4p	B5	F70L	B14B	F70M		
0.37 kW	35 rpm	1.3	64 Nm	MRT 60	80	71-2p	B5	F60L	B14B	F60M		
0.37 kW	35 rpm	1.9	56 Nm	MRT 70	80	71-2p	B5	F70L	B14B	F70M		
0.37 kW	36 rpm	1.8	77 Nm	MRT 60	25	80-6p	B14B	F60L	B14A	F60S		
0.37 kW	36 rpm	2.2	80 Nm	MRT 70	25	80-6p	B14B	F70L	B14A	F70S		
0.37 kW	36 rpm	3.1	80 Nm	MRT 80	25	80-6p	B14B	F80M	B5	F80L		
0.37 kW	40 rpm	1	52 Nm	MRT 50	70	71-2p	B14A	F50M				
0.37 kW	40 rpm	1.6	55 Nm	MRT 60	70	71-2p	B5	F60L	B14B	F60M		
0.37 kW	40 rpm	2.5	51 Nm	MRT 70	70	71-2p	B5	F70L	B14B	F70M		
0.37 kW	45 rpm	1.2	64 Nm	MRT 50	20	80-6p	B14A	F50L				
0.37 kW	45 rpm	1.9	64 Nm	MRT 60	20	80-6p	B14B	F60L	B14A	F60S		
0.37 kW	45 rpm	2.8	66 Nm	MRT 70	20	80-6p	B14B	F70L	B14A	F70S		
0.37 kW	45 rpm	3.9	67 Nm	MRT 80	20	80-6p	B14B	F80M	B5	F80L		
0.37 kW	47 rpm	1.4	56 Nm	MRT 50	30	71-4p	B14A	F50M				
0.37 kW	47 rpm	2.3	58 Nm	MRT 60	30	71-4p	B5	F60L	B14B	F60M		
0.37 kW	47 rpm	3.3	58 Nm	MRT 70	30	71-4p	B5	F70L	B14B	F70M		
0.37 kW	47 rpm	1.2	46 Nm	MRT 50	60	71-2p	B14A	F50M				
0.37 kW	47 rpm	2	48 Nm	MRT 60	60	71-2p	B5	F60L	B14B	F60M		
0.37 kW	47 rpm	2.9	48 Nm	MRT 70	60	71-2p	B5	F70L	B14B	F70M		
0.37 kW	56 rpm	1.3	49 Nm	MRT 50	25	71-4p	B14A	F50M				
0.37 kW	56 rpm	2.5	50 Nm	MRT 60	25	71-4p	B5	F60L	B14B	F60M		
0.37 kW	56 rpm	3.1	52 Nm	MRT 70	25	71-4p	B5	F70L	B14B	F70M		
0.37 kW	56 rpm	1.3	42 Nm	MRT 50	50	71-2p	B14A	F50M				
0.37 kW	56 rpm	2.5	41 Nm	MRT 60	50	71-2p	B5	F60L	B14B	F60M		
0.37 kW	56 rpm	3.3	45 Nm	MRT 70	50	71-2p	B5	F70L	B14B	F70M		
0.37 kW	60 rpm	1.7	49 Nm	MRT 50	15	80-6p	B14A	F50L				
0.37 kW	60 rpm	2.6	50 Nm	MRT 60	15	80-6p	B14B	F60L	B14A	F60S		
0.37 kW	60 rpm	3.9	51 Nm	MRT 70	15	80-6p	B14B	F70L	B14A	F70S		
0.37 kW	70 rpm	1.7	42 Nm	MRT 50	20	71-4p	B14A	F50M				
0.37 kW	70 rpm	2.6	42 Nm	MRT 60	20	71-4p	B5	F60L	B14B	F60M		
0.37 kW	70 rpm	3.9	43 Nm	MRT 70	20	71-4p	B5	F70L	B14B	F70M		
0.37 kW	70 rpm	1	33 Nm	MRT 40	40	71-2p	B14A	F40M				
0.37 kW	70 rpm	1.7	37 Nm	MRT 50	40	71-2p	B14A	F50M				
0.37 kW	70 rpm	3	36 Nm	MRT 60	40	71-2p	B5	F60L	B14B	F60M		
0.37 kW	72 rpm	1.8	42 Nm	MRT 50	12.5	80-6p	B14A	F50L				
0.37 kW	72 rpm	2.9	42 Nm	MRT 60	12.5	80-6p	B14B	F60L	B14A	F60S		
0.37 kW	72 rpm	4.1	43 Nm	MRT 70	12.5	80-6p	B14B	F70L	B14A	F70S		
0.37 kW	90 rpm	2.3	34 Nm	MRT 50	10	80-6p	B14A	F50L				
0.37 kW	90 rpm	3.5	35 Nm	MRT 60	10	80-6p	B14B	F60L	B14A	F60S		
0.37 kW	93 rpm	1.2	31 Nm	MRT 40	15	71-4p	B14A	F40M				
0.37 kW	93 rpm	2.3	32 Nm	MRT 50	15	71-4p	B14A	F50M				
0.37 kW	93 rpm	3.6	33 Nm	MRT 60	15	71-4p	B5	F60L	B14B	F60M		
0.37 kW	93 rpm	1.3	27 Nm	MRT 40	30	71-2p	B14A	F40M				
0.37 kW	93 rpm	2.3	28 Nm	MRT 50	30	71-2p	B14A	F50M				
0.37 kW	93 rpm	4	29 Nm	MRT 60	30	71-2p	B5	F60L	B14B	F60M		
0.37 kW	112 rpm	1.4	27 Nm	MRT 40	12.5	71-4p	B14A	F40M				
0.37 kW	112 rpm	2.5	27 Nm	MRT 50	12.5	71-4p	B14A	F50M				
0.37 kW	112 rpm	4	27 Nm	MRT 60	12.5	71-4p	B5	F60L	B14B	F60M		
0.37 kW	112 rpm	1.2	25 Nm	MRT 40	25	71-2p	B14A	F40M				

							STANDARD		OPTIONAL			
OUTPUT	OUTPUT SPEED	SERVICE FACTOR	OUTPUT TORQUE	GEARBOX SIZE	RATIO i	MOTOR SIZE-POLES	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE
0.37 kW	112 rpm	2.1	25 Nm	MRT 50	25	71-2p	B14A	F50M				
0.37 kW	120 rpm	3	25 Nm	MRT 50	7.5	80-6p	B14A	F50L				
0.37 kW	140 rpm	1.9	21 Nm	MRT 40	10	71-4p	B14A	F40M				
0.37 kW	140 rpm	3.2	22 Nm	MRT 50	10	71-4p	B14A	F50M				
0.37 kW	140 rpm	1.6	20 Nm	MRT 40	20	71-2p	B14A	F40M				
0.37 kW	140 rpm	2.9	21 Nm	MRT 50	20	71-2p	B14A	F50M				
0.37 kW	180 rpm	4.1	17 Nm	MRT 50	5	80-6p	B14A	F50L				
0.37 kW	187 rpm	2.3	16 Nm	MRT 40	7.5	71-4p	B14A	F40M				
0.37 kW	187 rpm	4.1	16 Nm	MRT 50	7.5	71-4p	B14A	F50M				
0.37 kW	187 rpm	2.1	16 Nm	MRT 40	15	71-2p	B14A	F40M				
0.37 kW	187 rpm	4	16 Nm	MRT 50	15	71-2p	B14A	F50M				
0.37 kW	224 rpm	2.5	13 Nm	MRT 40	12.5	71-2p	B14A	F40M				
0.37 kW	224 rpm	4	14 Nm	MRT 50	12.5	71-2p	B14A	F50M				
0.37 kW	280 rpm	3.2	11 Nm	MRT 40	5	71-4p	B14A	F40M				
0.37 kW	280 rpm	4.1	11 Nm	MRT 50	5	71-4p	B14A	F50M				
0.37 kW	290 rpm	3.4	10 Nm	MRT 40	10	71-2p	B14A	F40M				
0.37 kW	373 rpm	3.8	8 Nm	MRT 40	7.5	71-2p	B14A	F40M				
0.55 kW	9 rpm	1.3	292 Nm	MRT 100	100	80-6p	B5	F100M				
0.55 kW	11 rpm	1.4	289 Nm	MRT 100	80	80-6p	B5	F100M				
0.55 kW	13 rpm	1	237 Nm	MRT 80	70	80-6p	B14B	F80M	B5	F80L		
0.55 kW	14 rpm	1.7	195 Nm	MRT 100	100	80-4p	B5	F100M				
0.55 kW	15 rpm	1.1	221 Nm	MRT 80	60	80-6p	B14B	F80M	B5	F80L		
0.55 kW	15 rpm	2.2	221 Nm	MRT 100	60	80-6p	B5	F100M				
0.55 kW	18 rpm	1.2	171 Nm	MRT 80	80	80-4p	B14B	F80M	B5	F80L		
0.55 kW	18 rpm	2	189 Nm	MRT 100	80	80-4p	B5	F100M				
0.55 kW	18 rpm	1	201 Nm	MRT 70	50	80-6p	B14B	F70L	B14A	F70S		
0.55 kW	18 rpm	1.3	204 Nm	MRT 80	50	80-6p	B14B	F80M	B5	F80L		
0.55 kW	18 rpm	2.5	198 Nm	MRT 100	50	80-6p	B5	F100M				
0.55 kW	20 rpm	1	150 Nm	MRT 70	70	80-4p	B14B	F70L	B14A	F70S		
0.55 kW	20 rpm	1.4	155 Nm	MRT 80	70	80-4p	B14B	F80M	B5	F80L		
0.55 kW	23 rpm	1.1	142 Nm	MRT 70	60	80-4p	B14B	F70L	B14A	F70S		
0.55 kW	23 rpm	1.5	144 Nm	MRT 80	60	80-4p	B14B	F80M	B5	F80L		
0.55 kW	23 rpm	3	144 Nm	MRT 100	60	80-4p	B5	F100M				
0.55 kW	23 rpm	1.1	168 Nm	MRT 70	40	80-6p	B14B	F70L	B14A	F70S		
0.55 kW	23 rpm	1.7	168 Nm	MRT 80	40	80-6p	B14B	F80M	B5	F80L		
0.55 kW	23 rpm	3.1	168 Nm	MRT 100	40	80-6p	B5	F100M				
0.55 kW	28 rpm	1	120 Nm	MRT 60	50	80-4p	B14B	F60L	B14A	F60S		
0.55 kW	28 rpm	1.3	131 Nm	MRT 70	50	80-4p	B14B	F70L	B14A	F70S		
0.55 kW	28 rpm	1.8	133 Nm	MRT 80	50	80-4p	B14B	F80M	B5	F80L		
0.55 kW	28 rpm	3.5	129 Nm	MRT 100	50	80-4p	B5	F100M				
0.55 kW	28 rpm	1.1	92 Nm	MRT 70	100	71-2p	B5	F70L	B14B	F70M		
0.55 kW	30 rpm	1.1	131 Nm	MRT 60	30	80-6p	B14B	F60L	B14A	F60S		
0.55 kW	30 rpm	1.6	133 Nm	MRT 70	30	80-6p	B14B	F70L	B14A	F70S		
0.55 kW	30 rpm	2.4	130 Nm	MRT 80	30	80-6p	B14B	F80M	B5	F80L		
0.55 kW	30 rpm	4.1	135 Nm	MRT 100	30	80-6p	B5	F100M				
0.55 kW	35 rpm	1.2	107 Nm	MRT 60	40	80-4p	B14B	F60L	B14A	F60S		
0.55 kW	35 rpm	1.6	110 Nm	MRT 70	40	80-4p	B14B	F70L	B14A	F70S		
0.55 kW	35 rpm	2.4	110 Nm	MRT 80	40	80-4p	B14B	F80M	B5	F80L		
0.55 kW	35 rpm	4.1	110 Nm	MRT 100	40	80-4p	B5	F100M				
0.55 kW	35 rpm	1.3	83 Nm	MRT 70	80	71-2p	B5	F70L	B14B	F70M		
0.55 kW	36 rpm	1.2	114 Nm	MRT 60	25	80-6p	B14B	F60L	B14A	F60S		
0.55 kW	36 rpm	1.5	118 Nm	MRT 70	25	80-6p	B14B	F70L	B14A	F70S		
0.55 kW	36 rpm	2	120 Nm	MRT 80	25	80-6p	B14B	F80M	B5	F80L		
0.55 kW	36 rpm	3.8	117 Nm	MRT 100	25	80-6p	B5	F100M				
0.55 kW	40 rpm	1.1	81 Nm	MRT 60	70	71-2p	B5	F60L	B14B	F60M		
0.55 kW	40 rpm	1.6	76 Nm	MRT 70	70	71-2p	B5	F70L	B14B	F70M		
0.55 kW	45 rpm	1.3	96 Nm	MRT 60	20	80-6p	B14B	F60L	B14A	F60S		
0.55 kW	45 rpm	1.9	98 Nm	MRT 70	20	80-6p	B14B	F70L	B14A	F70S		
0.55 kW	45 rpm	2.6	99 Nm	MRT 80	20	80-6p	B14B	F80M	B5	F80L		
0.55 kW	47 rpm	1.6	86 Nm	MRT 60	30	80-4p	B14B	F60L	B14A	F60S		
0.55 kW	47 rpm	2.2	87 Nm	MRT 70	30	80-4p	B14B	F70L	B14A	F70S		
0.55 kW	47 rpm	3.4	84 Nm	MRT 80	30	80-4p	B14B	F80M	B5	F80L		
0.55 kW	47 rpm	1.3	71 Nm	MRT 60	60	71-2p	B5	F60L	B14B	F60M		
0.55 kW	47 rpm	1.9	72 Nm	MRT 70	60	71-2p	B5	F70L	B14B	F70M		
0.55 kW	56 rpm	1.7	74 Nm	MRT 60	25	80-4p	B14B	F60L	B14A	F60S		
0.55 kW	56 rpm	2.1	77 Nm	MRT 70	25	80-4p	B14B	F70L	B14A	F70S		
0.55 kW	56 rpm	2.8	78 Nm	MRT 80	25	80-4p	B14B	F80M	B5	F80L		
0.55 kW	56 rpm	4.1	76 Nm	MRT 100	25	80-4p	B5	F100M				
0.55 kW	56 rpm	1.6	61 Nm	MRT 60	50	71-2p	B5	F60L	B14B	F60M		
0.55 kW	56 rpm	2.2	67 Nm	MRT 70	50	71-2p	B5	F70L	B14B	F70M		
0.55 kW	60 rpm	1.1	74 Nm	MRT 50	15	80-6p	B14A	F50L				
0.55 kW	60 rpm	1.8	74 Nm	MRT 60	15	80-6p	B14B	F60L	B14A	F60S		
0.55 kW	60 rpm	2.7	75 Nm	MRT 70	15	80-6p	B14B	F70L	B14A	F70S		
0.55 kW	60 rpm	3.7	74 Nm	MRT 80	15	80-6p	B14B	F80M	B5	F80L		
0.55 kW	70 rpm	1.1	62 Nm	MRT 50	20	80-4p	B14A	F50L				
0.55 kW	70 rpm	1.8	62 Nm	MRT 60	20	80-4p	B14B	F60L	B14A	F60S		
0.55 kW	70 rpm	2.6	64 Nm	MRT 70	20	80-4p	B14B	F70L	B14A	F70S		
0.55 kW	70 rpm	3.6	65 Nm	MRT 80	20	80-4p	B14B	F80M	B5	F80L		
0.55 kW	70 rpm	1.1	55 Nm	MRT 50	40	71-2p	B14A	F50M				
0.55 kW	70 rpm	2	54 Nm	MRT 60	40	71-2p	B5	F60L	B14B	F60M		
0.55 kW	70 rpm	2.6	56 Nm	MRT 70	40	71-2p	B5	F70L	B14B	F70M		
0.55 kW	72 rpm	1.2	62 Nm	MRT 50	12.5	80-6p	B14A	F50L				

							STANDARD		OPTIONAL			
OUTPUT	OUTPUT SPEED	SERVICE FACTOR	OUTPUT TORQUE	GEARBOX SIZE	RATIO i	MOTOR SIZE-POLES	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE
0.55 kW	72 rpm	1.9	63 Nm	MRT 60	12.5	80-6p	B14B	F60L	B14A	F60S		
0.55 kW	72 rpm	3.1	64 Nm	MRT 70	12.5	80-6p	B14B	F70L	B14A	F70S		
0.55 kW	90 rpm	1.5	50 Nm	MRT 50	10	80-6p	B14A	F50L				
0.55 kW	90 rpm	2.4	51 Nm	MRT 60	10	80-6p	B14B	F60L	B14A	F60S		
0.55 kW	90 rpm	3.4	53 Nm	MRT 70	10	80-6p	B14B	F70L	B14A	F70S		
0.55 kW	93 rpm	1.5	48 Nm	MRT 50	15	80-4p	B14A	F50L				
0.55 kW	93 rpm	2.5	48 Nm	MRT 60	15	80-4p	B14B	F60L	B14A	F60S		
0.55 kW	93 rpm	3.7	49 Nm	MRT 70	15	80-4p	B14B	F70L	B14A	F70S		
0.55 kW	93 rpm	1.5	42 Nm	MRT 50	30	71-2p	B14A	F50M				
0.55 kW	93 rpm	2.7	43 Nm	MRT 60	30	71-2p	B5	F60L	B14B	F60M		
0.55 kW	93 rpm	3.6	44 Nm	MRT 70	30	71-2p	B5	F70L	B14B	F70M		
0.55 kW	112 rpm	1.7	40 Nm	MRT 50	12.5	80-4p	B14A	F50L				
0.55 kW	112 rpm	2.6	41 Nm	MRT 60	12.5	80-4p	B14B	F60L	B14A	F60S		
0.55 kW	112 rpm	4.1	42 Nm	MRT 70	12.5	80-4p	B14B	F70L	B14A	F70S		
0.55 kW	112 rpm	1.4	37 Nm	MRT 50	25	71-2p	B14A	F50M				
0.55 kW	112 rpm	2.7	38 Nm	MRT 60	25	71-2p	B5	F60L	B14B	F60M		
0.55 kW	112 rpm	3.4	39 Nm	MRT 70	25	71-2p	B5	F70L	B14B	F70M		
0.55 kW	120 rpm	1.9	38 Nm	MRT 50	7.5	80-6p	B14A	F50L				
0.55 kW	120 rpm	3.4	39 Nm	MRT 60	7.5	80-6p	B14B	F60L	B14A	F60S		
0.55 kW	140 rpm	2.1	33 Nm	MRT 50	10	80-4p	B14A	F50L				
0.55 kW	140 rpm	3.3	33 Nm	MRT 60	10	80-4p	B14B	F60L	B14A	F60S		
0.55 kW	140 rpm	1.1	30 Nm	MRT 40	20	71-2p	B14A	F40M				
0.55 kW	140 rpm	1.9	32 Nm	MRT 50	20	71-2p	B14A	F50M				
0.55 kW	140 rpm	2.9	32 Nm	MRT 60	20	71-2p	B5	F60L	B14B	F60M		
0.55 kW	180 rpm	2.8	26 Nm	MRT 50	5	80-6p	B14A	F50L				
0.55 kW	180 rpm	4.1	26 Nm	MRT 60	5	80-6p	B14B	F60L	B14A	F60S		
0.55 kW	187 rpm	2.7	24 Nm	MRT 50	7.5	80-4p	B14A	F50L				
0.55 kW	187 rpm	4.1	25 Nm	MRT 60	7.5	80-4p	B14B	F60L	B14A	F60S		
0.55 kW	187 rpm	1.4	24 Nm	MRT 40	15	71-2p	B14A	F40M				
0.55 kW	187 rpm	2.6	24 Nm	MRT 50	15	71-2p	B14A	F50M				
0.55 kW	187 rpm	4.1	24 Nm	MRT 60	15	71-2p	B5	F60L	B14B	F60M		
0.55 kW	224 rpm	1.6	20 Nm	MRT 40	12.5	71-2p	B14A	F40M				
0.55 kW	224 rpm	2.8	20 Nm	MRT 50	12.5	71-2p	B14A	F50M				
0.55 kW	280 rpm	3.8	17 Nm	MRT 50	5	80-4p	B14A	F50L				
0.55 kW	290 rpm	2.1	16 Nm	MRT 40	10	71-2p	B14A	F40M				
0.55 kW	290 rpm	3.7	16 Nm	MRT 50	10	71-2p	B14A	F50M				
0.75 kW	11 rpm	1	395 Nm	MRT 100	80	90-6p	B5	F100M	B14B	F100S		
0.75 kW	14 rpm	1.2	266 Nm	MRT 100	100	80-4p	B5	F100M				
0.75 kW	15 rpm	1.6	301 Nm	MRT 100	60	90-6p	B5	F100M	B14B	F100S		
0.75 kW	18 rpm	1.4	258 Nm	MRT 100	80	80-4p	B5	F100M				
0.75 kW	18 rpm	1.8	271 Nm	MRT 100	50	90-6p	B5	F100M	B14B	F100S		
0.75 kW	20 rpm	1	211 Nm	MRT 80	70	80-4p	B14B	F80M	B5	F80L		
0.75 kW	23 rpm	1.1	196 Nm	MRT 80	60	80-4p	B14B	F80M	B5	F80L		
0.75 kW	23 rpm	2.2	196 Nm	MRT 100	60	80-4p	B5	F100M				
0.75 kW	23 rpm	1.3	229 Nm	MRT 80	40	90-6p	B14B	F80M	B14A	F80S	B5	F80L
0.75 kW	23 rpm	2.3	229 Nm	MRT 100	40	90-6p	B5	F100M	B14B	F100S		
0.75 kW	28 rpm	1	179 Nm	MRT 70	50	80-4p	B14B	F70L	B14A	F70S		
0.75 kW	28 rpm	1.3	182 Nm	MRT 80	50	80-4p	B14B	F80M	B5	F80L		
0.75 kW	28 rpm	2.5	177 Nm	MRT 100	50	80-4p	B5	F100M				
0.75 kW	28 rpm	1	146 Nm	MRT 80	100	80-2p	B14B	F80M	B5	F80L		
0.75 kW	28 rpm	2	138 Nm	MRT 100	100	80-2p	B5	F100M				
0.75 kW	30 rpm	1.1	181 Nm	MRT 70	30	90-6p	B14B	F70L	B14A	F70M		
0.75 kW	30 rpm	1.8	177 Nm	MRT 80	30	90-6p	B14B	F80M	B14A	F80S	B5	F80L
0.75 kW	30 rpm	3	184 Nm	MRT 100	30	90-6p	B5	F100M	B14B	F100S		
0.75 kW	35 rpm	1.1	149 Nm	MRT 70	40	80-4p	B14B	F70L	B14A	F70S		
0.75 kW	35 rpm	1.8	149 Nm	MRT 80	40	80-4p	B14B	F80M	B5	F80L		
0.75 kW	35 rpm	3.2	149 Nm	MRT 100	40	80-4p	B5	F100M				
0.75 kW	35 rpm	1.4	121 Nm	MRT 80	80	80-2p	B14B	F80M	B5	F80L		
0.75 kW	35 rpm	2.4	131 Nm	MRT 100	80	80-2p	B5	F100M				
0.75 kW	36 rpm	1.1	161 Nm	MRT 70	25	90-6p	B14B	F70L	B14A	F70M		
0.75 kW	36 rpm	1.5	163 Nm	MRT 80	25	90-6p	B14B	F80M	B14A	F80S	B5	F80L
0.75 kW	36 rpm	2.8	159 Nm	MRT 100	25	90-6p	B5	F100M	B14B	F100S		
0.75 kW	40 rpm	1.2	104 Nm	MRT 70	70	80-2p	B14B	F70L	B14A	F70S		
0.75 kW	40 rpm	1.7	107 Nm	MRT 80	70	80-2p	B14B	F80M	B5	F80L		
0.75 kW	45 rpm	1.4	134 Nm	MRT 70	20	90-6p	B14B	F70L	B14A	F70M		
0.75 kW	45 rpm	1.9	135 Nm	MRT 80	20	90-6p	B14B	F80M	B14A	F80S	B5	F80L
0.75 kW	45 rpm	3.4	132 Nm	MRT 100	20	90-6p	B5	F100M	B14B	F100S		
0.75 kW	47 rpm	1.1	117 Nm	MRT 60	30	80-4p	B14B	F60L	B14A	F60S		
0.75 kW	47 rpm	1.6	118 Nm	MRT 70	30	80-4p	B14B	F70L	B14A	F70S		
0.75 kW	47 rpm	2.4	115 Nm	MRT 80	30	80-4p	B14B	F80M	B5	F80L		
0.75 kW	47 rpm	4.1	120 Nm	MRT 100	30	80-4p	B5	F100M				
0.75 kW	47 rpm	1.4	98 Nm	MRT 70	60	80-2p	B14B	F70L	B14A	F70S		
0.75 kW	47 rpm	1.8	100 Nm	MRT 80	60	80-2p	B14B	F80M	B5	F80L		
0.75 kW	47 rpm	3.7	100 Nm	MRT 100	60	80-2p	B5	F100M				
0.75 kW	56 rpm	1.2	101 Nm	MRT 60	25	80-4p	B14B	F60L	B14A	F60S		
0.75 kW	56 rpm	1.5	105 Nm	MRT 70	25	80-4p	B14B	F70L	B14A	F70S		
0.75 kW	56 rpm	2.1	106 Nm	MRT 80	25	80-4p	B14B	F80M	B5	F80L		
0.75 kW	56 rpm	3.8	104 Nm	MRT 100	25	80-4p	B5	F100M				
0.75 kW	56 rpm	1.2	83 Nm	MRT 60	50	80-2p	B14B	F60L	B14A	F60S		
0.75 kW	56 rpm	1.6	91 Nm	MRT 70	50	80-2p	B14B	F70L	B14A	F70S		
0.75 kW	56 rpm	2.2	92 Nm	MRT 80	50	80-2p	B14B	F80M	B5	F80L		
0.75 kW	60 rpm	1.3	101 Nm	MRT 60	15	90-6p	B14B	F60L	B14A	F60M		

							STANDARD		OPTIONAL			
OUTPUT	OUTPUT SPEED	SERVICE FACTOR	OUTPUT TORQUE	GEARBOX SIZE	RATIO i	MOTOR SIZE-POLES	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE
0.75 kW	60 rpm	1.9	103 Nm	MRT 70	15	90-6p	B14B	F70L	B14A	F70M		
0.75 kW	60 rpm	2.7	101 Nm	MRT 80	15	90-6p	B14B	F80M	B14A	F80S	B5	F80L
0.75 kW	70 rpm	1.3	85 Nm	MRT 60	20	80-4p	B14B	F60L	B14A	F60S		
0.75 kW	70 rpm	1.9	87 Nm	MRT 70	20	80-4p	B14B	F70L	B14A	F70S		
0.75 kW	70 rpm	2.6	88 Nm	MRT 80	20	80-4p	B14B	F80M	B5	F80L		
0.75 kW	70 rpm	4.1	86 Nm	MRT 100	20	80-4p	B5	F100M				
0.75 kW	70 rpm	1.4	74 Nm	MRT 60	40	80-2p	B14B	F60L	B14A	F60S		
0.75 kW	70 rpm	1.9	76 Nm	MRT 70	40	80-2p	B14B	F70L	B14A	F70S		
0.75 kW	70 rpm	2.9	76 Nm	MRT 80	40	80-2p	B14B	F80M	B5	F80L		
0.75 kW	72 rpm	1.4	86 Nm	MRT 60	12.5	90-6p	B14B	F60L	B14A	F60M		
0.75 kW	72 rpm	2.2	88 Nm	MRT 70	12.5	90-6p	B14B	F70L	B14A	F70M		
0.75 kW	72 rpm	2.7	88 Nm	MRT 80	12.5	90-6p	B14B	F80M	B14A	F80S	B5	F80L
0.75 kW	90 rpm	1.7	70 Nm	MRT 60	10	90-6p	B14B	F60L	B14A	F60M		
0.75 kW	90 rpm	2.5	72 Nm	MRT 70	10	90-6p	B14B	F70L	B14A	F70M		
0.75 kW	90 rpm	2.9	72 Nm	MRT 80	10	90-6p	B14B	F80M	B14A	F80S	B5	F80L
0.75 kW	93 rpm	1.1	65 Nm	MRT 50	15	80-4p	B14A	F50L				
0.75 kW	93 rpm	1.8	66 Nm	MRT 60	15	80-4p	B14B	F60L	B14A	F60S		
0.75 kW	93 rpm	2.7	67 Nm	MRT 70	15	80-4p	B14B	F70L	B14A	F70S		
0.75 kW	93 rpm	3.7	66 Nm	MRT 80	15	80-4p	B14B	F80M	B5	F80L		
0.75 kW	93 rpm	1.1	58 Nm	MRT 50	30	80-2p	B14A	F50L				
0.75 kW	93 rpm	1.9	59 Nm	MRT 60	30	80-2p	B14B	F60L	B14A	F60S		
0.75 kW	93 rpm	2.7	60 Nm	MRT 70	30	80-2p	B14B	F70L	B14A	F70S		
0.75 kW	93 rpm	4.1	58 Nm	MRT 80	30	80-2p	B14B	F80M	B5	F80L		
0.75 kW	112 rpm	1.2	55 Nm	MRT 50	12.5	80-4p	B14A	F50L				
0.75 kW	112 rpm	1.9	56 Nm	MRT 60	12.5	80-4p	B14B	F60L	B14A	F60S		
0.75 kW	112 rpm	3.1	57 Nm	MRT 70	12.5	80-4p	B14B	F70L	B14A	F70S		
0.75 kW	112 rpm	1	51 Nm	MRT 50	25	80-2p	B14A	F50L				
0.75 kW	112 rpm	2	51 Nm	MRT 60	25	80-2p	B14B	F60L	B14A	F60S		
0.75 kW	112 rpm	2.5	53 Nm	MRT 70	25	80-2p	B14B	F70L	B14A	F70S		
0.75 kW	112 rpm	3.5	54 Nm	MRT 80	25	80-2p	B14B	F80M	B5	F80L		
0.75 kW	120 rpm	2.5	53 Nm	MRT 60	7.5	90-6p	B14B	F60L	B14A	F60M		
0.75 kW	120 rpm	3.2	53 Nm	MRT 70	7.5	90-6p	B14B	F70L	B14A	F70M		
0.75 kW	140 rpm	1.5	45 Nm	MRT 50	10	80-4p	B14A	F50L				
0.75 kW	140 rpm	2.4	46 Nm	MRT 60	10	80-4p	B14B	F60L	B14A	F60S		
0.75 kW	140 rpm	3.5	47 Nm	MRT 70	10	80-4p	B14B	F70L	B14A	F70S		
0.75 kW	140 rpm	1.4	43 Nm	MRT 50	20	80-2p	B14A	F50L				
0.75 kW	140 rpm	2.1	43 Nm	MRT 60	20	80-2p	B14B	F60L	B14A	F60S		
0.75 kW	140 rpm	3.2	44 Nm	MRT 70	20	80-2p	B14B	F70L	B14A	F70S		
0.75 kW	180 rpm	3.5	35 Nm	MRT 60	5	90-6p	B14B	F60L	B14A	F60M		
0.75 kW	187 rpm	2	33 Nm	MRT 50	7.5	80-4p	B14A	F50L				
0.75 kW	187 rpm	3.5	34 Nm	MRT 60	7.5	80-4p	B14B	F60L	B14A	F60S		
0.75 kW	187 rpm	1.9	33 Nm	MRT 50	15	80-2p	B14A	F50L				
0.75 kW	187 rpm	3	33 Nm	MRT 60	15	80-2p	B14B	F60L	B14A	F60S		
0.75 kW	224 rpm	2	28 Nm	MRT 50	12.5	80-2p	B14A	F50L				
0.75 kW	224 rpm	3.3	28 Nm	MRT 60	12.5	80-2p	B14B	F60L	B14A	F60S		
0.75 kW	280 rpm	2.8	23 Nm	MRT 50	5	80-4p	B14A	F50L				
0.75 kW	280 rpm	4.1	23 Nm	MRT 60	5	80-4p	B14B	F60L	B14A	F60S		
0.75 kW	290 rpm	2.7	22 Nm	MRT 50	10	80-2p	B14A	F50L				
0.75 kW	373 rpm	3.2	17 Nm	MRT 50	7.5	80-2p	B14A	F50L				
1.1 kW	11 rpm	1.1	626 Nm	MRT 120	80	90-6p	B5	F120M	B14B	F120S		
1.1 kW	14 rpm	1.1	465 Nm	MRT 120	100	90-4p	B5	F120M	B14B	F120S		
1.1 kW	15 rpm	1.1	441 Nm	MRT 100	60	90-6p	B5	F100M	B14B	F100S		
1.1 kW	15 rpm	1.6	448 Nm	MRT 120	60	90-6p	B5	F120M	B14B	F120S		
1.1 kW	18 rpm	1	378 Nm	MRT 100	80	90-4p	B5	F100M	B14B	F100S		
1.1 kW	18 rpm	1.5	408 Nm	MRT 120	80	90-4p	B5	F120M	B14B	F120S		
1.1 kW	18 rpm	1.2	397 Nm	MRT 100	50	90-6p	B5	F100M	B14B	F100S		
1.1 kW	18 rpm	1.8	414 Nm	MRT 120	50	90-6p	B5	F120M	B14B	F120S		
1.1 kW	23 rpm	1.5	288 Nm	MRT 100	60	90-4p	B5	F100M	B14B	F100S		
1.1 kW	23 rpm	2.3	293 Nm	MRT 120	60	90-4p	B5	F120M	B14B	F120S		
1.1 kW	23 rpm	1.5	336 Nm	MRT 100	40	90-6p	B5	F100M	B14B	F100S		
1.1 kW	23 rpm	2.4	341 Nm	MRT 120	40	90-6p	B5	F120M	B14B	F120S		
1.1 kW	28 rpm	1.7	259 Nm	MRT 100	50	90-4p	B5	F100M	B14B	F100S		
1.1 kW	28 rpm	2.5	270 Nm	MRT 120	50	90-4p	B5	F120M	B14B	F120S		
1.1 kW	28 rpm	1.4	203 Nm	MRT 100	100	80-2p	B5	F100M				
1.1 kW	30 rpm	1.2	259 Nm	MRT 80	30	90-6p	B14B	F80M	B14A	F80S	B5	F80L
1.1 kW	30 rpm	2	270 Nm	MRT 100	30	90-6p	B5	F100M	B14B	F100S		
1.1 kW	30 rpm	3.2	277 Nm	MRT 120	30	90-6p	B5	F120M	B14B	F120S		
1.1 kW	35 rpm	1.2	219 Nm	MRT 80	40	90-4p	B14B	F80M	B14A	F80S	B5	F80L
1.1 kW	35 rpm	2.1	219 Nm	MRT 100	40	90-4p	B5	F100M	B14B	F100S		
1.1 kW	35 rpm	3.4	222 Nm	MRT 120	40	90-4p	B5	F120M	B14B	F120S		
1.1 kW	35 rpm	1	177 Nm	MRT 80	80	80-2p	B14B	F80M	B5	F80L		
1.1 kW	35 rpm	1.6	192 Nm	MRT 100	80	80-2p	B5	F100M				
1.1 kW	36 rpm	1	239 Nm	MRT 80	25	90-6p	B14B	F80M	B14A	F80S	B5	F80L
1.1 kW	36 rpm	1.9	233 Nm	MRT 100	25	90-6p	B5	F100M	B14B	F100S		
1.1 kW	36 rpm	2.9	242 Nm	MRT 120	25	90-6p	B5	F120M	B14B	F120S		
1.1 kW	40 rpm	1.1	158 Nm	MRT 80	70	80-2p	B14B	F80M	B5	F80L		
1.1 kW	45 rpm	1.3	198 Nm	MRT 80	20	90-6p	B14B	F80M	B14A	F80S	B5	F80L
1.1 kW	45 rpm	2.3	194 Nm	MRT 100	20	90-6p	B5	F100M	B14B	F100S		
1.1 kW	45 rpm	3.5	196 Nm	MRT 120	20	90-6p	B5	F120M	B14B	F120S		
1.1 kW	47 rpm	1.1	173 Nm	MRT 70	30	90-4p	B14B	F70L	B14A	F70M		
1.1 kW	47 rpm	1.6	169 Nm	MRT 80	30	90-4p	B14B	F80M	B14A	F80S	B5	F80L
1.1 kW	47 rpm	2.8	176 Nm	MRT 100	30	90-4p	B5	F100M	B14B	F100S		

							STANDARD		OPTIONAL			
OUTPUT	OUTPUT SPEED	SERVICE FACTOR	OUTPUT TORQUE	GEARBOX SIZE	RATIO i	MOTOR SIZE-POLES	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE
1.1 kW	47 rpm	4.1	180 Nm	MRT 120	30	90-4p	B5	F120M	B14B	F120S		
1.1 kW	47 rpm	1.2	146 Nm	MRT 80	60	80-2p	B14B	F80M	B5	F80L		
1.1 kW	47 rpm	2.5	146 Nm	MRT 100	60	80-2p	B5	F100M				
1.1 kW	56 rpm	1	154 Nm	MRT 70	25	90-4p	B14B	F70L	B14A	F70M		
1.1 kW	56 rpm	1.4	156 Nm	MRT 80	25	90-4p	B14B	F80M	B14A	F80S	B5	F80L
1.1 kW	56 rpm	2.6	152 Nm	MRT 100	25	90-4p	B5	F100M	B14B	F100S		
1.1 kW	56 rpm	3.9	158 Nm	MRT 120	25	90-4p	B5	F120M	B14B	F120S		
1.1 kW	56 rpm	1.1	133 Nm	MRT 70	50	80-2p	B14B	F70L	B14A	F70S		
1.1 kW	56 rpm	1.5	135 Nm	MRT 80	50	80-2p	B14B	F80M	B5	F80L		
1.1 kW	56 rpm	2.9	131 Nm	MRT 100	50	80-2p	B5	F100M				
1.1 kW	60 rpm	1.3	151 Nm	MRT 70	15	90-6p	B14B	F70L	B14A	F70M		
1.1 kW	60 rpm	1.8	149 Nm	MRT 80	15	90-6p	B14B	F80M	B14A	F80S	B5	F80L
1.1 kW	60 rpm	3.4	152 Nm	MRT 100	15	90-6p	B5	F100M	B14B	F100S		
1.1 kW	70 rpm	1.3	128 Nm	MRT 70	20	90-4p	B14B	F70L	B14A	F70M		
1.1 kW	70 rpm	1.8	129 Nm	MRT 80	20	90-4p	B14B	F80M	B14A	F80S	B5	F80L
1.1 kW	70 rpm	3.2	126 Nm	MRT 100	20	90-4p	B5	F100M	B14B	F100S		
1.1 kW	70 rpm	1	108 Nm	MRT 60	40	80-2p	B14B	F60L	B14A	F60S		
1.1 kW	70 rpm	1.3	111 Nm	MRT 70	40	80-2p	B14B	F70L	B14A	F70S		
1.1 kW	70 rpm	2	111 Nm	MRT 80	40	80-2p	B14B	F80M	B5	F80L		
1.1 kW	70 rpm	3.6	111 Nm	MRT 100	40	80-2p	B5	F100M				
1.1 kW	72 rpm	1.5	128 Nm	MRT 70	12.5	90-6p	B14B	F70L	B14A	F70M		
1.1 kW	72 rpm	1.9	128 Nm	MRT 80	12.5	90-6p	B14B	F80M	B14A	F80S	B5	F80L
1.1 kW	72 rpm	3.7	130 Nm	MRT 100	12.5	90-6p	B5	F100M	B14B	F100S		
1.1 kW	90 rpm	1.2	103 Nm	MRT 60	10	90-6p	B14B	F60L	B14A	F60M		
1.1 kW	90 rpm	1.7	105 Nm	MRT 70	10	90-6p	B14B	F70L	B14A	F70M		
1.1 kW	90 rpm	2	105 Nm	MRT 80	10	90-6p	B14B	F80M	B14A	F80S	B5	F80L
1.1 kW	90 rpm	3.7	103 Nm	MRT 100	10	90-6p	B5	F100M	B14B	F100S		
1.1 kW	93 rpm	1.2	97 Nm	MRT 60	15	90-4p	B14B	F60L	B14A	F60M		
1.1 kW	93 rpm	1.8	98 Nm	MRT 70	15	90-4p	B14B	F70L	B14A	F70M		
1.1 kW	93 rpm	2.5	97 Nm	MRT 80	15	90-4p	B14B	F80M	B14A	F80S	B5	F80L
1.1 kW	93 rpm	4.1	99 Nm	MRT 100	15	90-4p	B5	F100M	B14B	F100S		
1.1 kW	93 rpm	1.3	87 Nm	MRT 60	30	80-2p	B14B	F60L	B14A	F60S		
1.1 kW	93 rpm	1.8	88 Nm	MRT 70	30	80-2p	B14B	F70L	B14A	F70S		
1.1 kW	93 rpm	2.8	86 Nm	MRT 80	30	80-2p	B14B	F80M	B5	F80L		
1.1 kW	112 rpm	1.3	82 Nm	MRT 60	12.5	90-4p	B14B	F60L	B14A	F60M		
1.1 kW	112 rpm	2.1	83 Nm	MRT 70	12.5	90-4p	B14B	F70L	B14A	F70M		
1.1 kW	112 rpm	2.6	83 Nm	MRT 80	12.5	90-4p	B14B	F80M	B14A	F80S	B5	F80L
1.1 kW	112 rpm	4.1	84 Nm	MRT 100	12.5	90-4p	B5	F100M	B14B	F100S		
1.1 kW	112 rpm	1.4	75 Nm	MRT 60	25	80-2p	B14B	F60L	B14A	F60S		
1.1 kW	112 rpm	1.7	78 Nm	MRT 70	25	80-2p	B14B	F70L	B14A	F70S		
1.1 kW	112 rpm	2.3	79 Nm	MRT 80	25	80-2p	B14B	F80M	B5	F80L		
1.1 kW	120 rpm	1.7	77 Nm	MRT 60	7.5	90-6p	B14B	F60L	B14A	F60M		
1.1 kW	120 rpm	2.1	78 Nm	MRT 70	7.5	90-6p	B14B	F70L	B14A	F70M		
1.1 kW	120 rpm	2.7	80 Nm	MRT 80	7.5	90-6p	B14B	F80M	B14A	F80S	B5	F80L
1.1 kW	140 rpm	1.6	67 Nm	MRT 60	10	90-4p	B14B	F60L	B14A	F60M		
1.1 kW	140 rpm	2.4	68 Nm	MRT 70	10	90-4p	B14B	F70L	B14A	F70M		
1.1 kW	140 rpm	2.7	68 Nm	MRT 80	10	90-4p	B14B	F80M	B14A	F80S	B5	F80L
1.1 kW	140 rpm	4.1	67 Nm	MRT 100	10	90-4p	B5	F100M	B14B	F100S		
1.1 kW	140 rpm	1.4	63 Nm	MRT 60	20	80-2p	B14B	F60L	B14A	F60S		
1.1 kW	140 rpm	2.2	65 Nm	MRT 70	20	80-2p	B14B	F70L	B14A	F70S		
1.1 kW	140 rpm	3	65 Nm	MRT 80	20	80-2p	B14B	F80M	B5	F80L		
1.1 kW	180 rpm	2.3	52 Nm	MRT 60	5	90-6p	B14B	F60L	B14A	F60M		
1.1 kW	180 rpm	3	53 Nm	MRT 70	5	90-6p	B14B	F70L	B14A	F70M		
1.1 kW	187 rpm	2.4	50 Nm	MRT 60	7.5	90-4p	B14B	F60L	B14A	F60M		
1.1 kW	187 rpm	3	51 Nm	MRT 70	7.5	90-4p	B14B	F70L	B14A	F70M		
1.1 kW	187 rpm	1.3	48 Nm	MRT 50	15	80-2p	B14A	F50L				
1.1 kW	187 rpm	2	49 Nm	MRT 60	15	80-2p	B14B	F60L	B14A	F60S		
1.1 kW	187 rpm	3	50 Nm	MRT 70	15	80-2p	B14B	F70L	B14A	F70S		
1.1 kW	224 rpm	1.3	41 Nm	MRT 50	12.5	80-2p	B14A	F50L				
1.1 kW	224 rpm	2.2	41 Nm	MRT 60	12.5	80-2p	B14B	F60L	B14A	F60S		
1.1 kW	224 rpm	3.5	42 Nm	MRT 70	12.5	80-2p	B14B	F70L	B14A	F70S		
1.1 kW	280 rpm	3.2	34 Nm	MRT 60	5	90-4p	B14B	F60L	B14A	F60M		
1.1 kW	280 rpm	4.1	34 Nm	MRT 70	5	90-4p	B14B	F70L	B14A	F70M		
1.1 kW	290 rpm	1.8	32 Nm	MRT 50	10	80-2p	B14A	F50L				
1.1 kW	290 rpm	2.8	33 Nm	MRT 60	10	80-2p	B14B	F60L	B14A	F60S		
1.1 kW	373 rpm	2.2	25 Nm	MRT 50	7.5	80-2p	B14A	F50L				
1.1 kW	373 rpm	4	25 Nm	MRT 60	7.5	80-2p	B14B	F60L	B14A	F60S		
1.5 kW	9 rpm	1.3	987 Nm	MRT 150	100	100-6p	B14B	F150S	B5	F150M		
1.5 kW	9 rpm	2	1003 Nm	MRT 180	100	100-6p	B5	F180S				
1.5 kW	11 rpm	1.7	815 Nm	MRT 150	80	100-6p	B14B	F150S	B5	F150M		
1.5 kW	11 rpm	2.6	815 Nm	MRT 180	80	100-6p	B5	F180S				
1.5 kW	15 rpm	1.2	611 Nm	MRT 120	60	100-6p	B14B	F120M	B14A	F120S	B5	F120L
1.5 kW	15 rpm	2	678 Nm	MRT 150	60	100-6p	B14B	F150S	B5	F150M		
1.5 kW	15 rpm	3.6	640 Nm	MRT 180	60	100-6p	B5	F180S				
1.5 kW	18 rpm	1.1	557 Nm	MRT 120	80	90-4p	B5	F120M	B14B	F120S		
1.5 kW	18 rpm	1.3	565 Nm	MRT 120	50	100-6p	B14B	F120M	B14A	F120S	B5	F120L
1.5 kW	18 rpm	2.4	613 Nm	MRT 150	50	100-6p	B14B	F150S	B5	F150M		
1.5 kW	18 rpm	4.1	573 Nm	MRT 180	50	100-6p	B5	F180S				
1.5 kW	23 rpm	1.1	393 Nm	MRT 100	60	90-4p	B5	F100M	B14B	F100S		
1.5 kW	23 rpm	1.7	399 Nm	MRT 120	60	90-4p	B5	F120M	B14B	F120S		
1.5 kW	23 rpm	1.1	458 Nm	MRT 100	40	100-6p	B14B	F100M	B14A	F100S	B5	F100L
1.5 kW	23 rpm	1.8	465 Nm	MRT 120	40	100-6p	B14B	F120M	B14A	F120S	B5	F120L

							STANDARD		OPTIONAL			
OUTPUT	OUTPUT SPEED	SERVICE FACTOR	OUTPUT TORQUE	GEARBOX SIZE	RATIO i	MOTOR SIZE-POLES	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE
1.5 kW	23 rpm	3.4	497 Nm	MRT 150	40	100-6p	B14B	F150S	B5	F150M		
1.5 kW	28 rpm	1.3	353 Nm	MRT 100	50	90-4p	B5	F100M	B14B	F100S		
1.5 kW	28 rpm	1.9	368 Nm	MRT 120	50	90-4p	B5	F120M	B14B	F120S		
1.5 kW	28 rpm	1	276 Nm	MRT 100	100	90-2p	B5	F100M	B14B	F100S		
1.5 kW	28 rpm	1.3	327 Nm	MRT 120	100	90-2p	B5	F120M	B14B	F120S		
1.5 kW	30 rpm	1.5	368 Nm	MRT 100	30	100-6p	B14B	F100M	B14A	F100S	B5	F100L
1.5 kW	30 rpm	2.4	377 Nm	MRT 120	30	100-6p	B14B	F120M	B14A	F120S	B5	F120L
1.5 kW	35 rpm	1.6	299 Nm	MRT 100	40	90-4p	B5	F100M	B14B	F100S		
1.5 kW	35 rpm	2.5	303 Nm	MRT 120	40	90-4p	B5	F120M	B14B	F120S		
1.5 kW	35 rpm	1.2	262 Nm	MRT 100	80	90-2p	B5	F100M	B14B	F100S		
1.5 kW	35 rpm	1.9	282 Nm	MRT 120	80	90-2p	B5	F120M	B14B	F120S		
1.5 kW	36 rpm	1.4	318 Nm	MRT 100	25	100-6p	B14B	F100M	B14A	F100S	B5	F100L
1.5 kW	36 rpm	2.1	330 Nm	MRT 120	25	100-6p	B14B	F120M	B14A	F120S	B5	F120L
1.5 kW	36 rpm	3.6	326 Nm	MRT 150	25	100-6p	B14B	F150S	B5	F150M		
1.5 kW	45 rpm	1.7	264 Nm	MRT 100	20	100-6p	B14B	F100M	B14A	F100S	B5	F100L
1.5 kW	45 rpm	2.6	267 Nm	MRT 120	20	100-6p	B14B	F120M	B14A	F120S	B5	F120L
1.5 kW	47 rpm	1.2	230 Nm	MRT 80	30	90-4p	B14B	F80M	B14A	F80S	B5	F80L
1.5 kW	47 rpm	2	239 Nm	MRT 100	30	90-4p	B5	F100M	B14B	F100S		
1.5 kW	47 rpm	3.2	246 Nm	MRT 120	30	90-4p	B5	F120M	B14B	F120S		
1.5 kW	47 rpm	1.8	200 Nm	MRT 100	60	90-2p	B5	F100M	B14B	F100S		
1.5 kW	47 rpm	2.8	203 Nm	MRT 120	60	90-2p	B5	F120M	B14B	F120S		
1.5 kW	56 rpm	1	212 Nm	MRT 80	25	90-4p	B14B	F80M	B14A	F80S	B5	F80L
1.5 kW	56 rpm	1.9	207 Nm	MRT 100	25	90-4p	B5	F100M	B14B	F100S		
1.5 kW	56 rpm	2.9	215 Nm	MRT 120	25	90-4p	B5	F120M	B14B	F120S		
1.5 kW	56 rpm	1.1	184 Nm	MRT 80	50	90-2p	B14B	F80M	B14A	F80S	B5	F80L
1.5 kW	56 rpm	2.1	179 Nm	MRT 100	50	90-2p	B5	F100M	B14B	F100S		
1.5 kW	56 rpm	3.1	187 Nm	MRT 120	50	90-2p	B5	F120M	B14B	F120S		
1.5 kW	60 rpm	1.3	203 Nm	MRT 80	15	100-6p	B14A	F80M	B14B	F80L		
1.5 kW	60 rpm	2.4	208 Nm	MRT 100	15	100-6p	B14B	F100M	B14A	F100S	B5	F100L
1.5 kW	60 rpm	3.8	210 Nm	MRT 120	15	100-6p	B14B	F120M	B14A	F120S	B5	F120L
1.5 kW	70 rpm	1.3	176 Nm	MRT 80	20	90-4p	B14B	F80M	B14A	F80S	B5	F80L
1.5 kW	70 rpm	2.3	172 Nm	MRT 100	20	90-4p	B5	F100M	B14B	F100S		
1.5 kW	70 rpm	3.6	174 Nm	MRT 120	20	90-4p	B5	F120M	B14B	F120S		
1.5 kW	70 rpm	1.5	151 Nm	MRT 80	40	90-2p	B14B	F80M	B14A	F80S	B5	F80L
1.5 kW	70 rpm	2.6	151 Nm	MRT 100	40	90-2p	B5	F100M	B14B	F100S		
1.5 kW	70 rpm	4.1	153 Nm	MRT 120	40	90-2p	B5	F120M	B14B	F120S		
1.5 kW	72 rpm	1.4	175 Nm	MRT 80	12.5	100-6p	B14A	F80M	B14B	F80L		
1.5 kW	72 rpm	2.7	177 Nm	MRT 100	12.5	100-6p	B14B	F100M	B14A	F100S	B5	F100L
1.5 kW	72 rpm	4.1	179 Nm	MRT 120	12.5	100-6p	B14B	F120M	B14A	F120S	B5	F120L
1.5 kW	90 rpm	1.4	143 Nm	MRT 80	10	100-6p	B14A	F80M	B14B	F80L		
1.5 kW	90 rpm	2.7	140 Nm	MRT 100	10	100-6p	B14B	F100M	B14A	F100S	B5	F100L
1.5 kW	93 rpm	1.3	134 Nm	MRT 70	15	90-4p	B14B	F70L	B14A	F70M		
1.5 kW	93 rpm	1.8	132 Nm	MRT 80	15	90-4p	B14B	F80M	B14A	F80S	B5	F80L
1.5 kW	93 rpm	3.4	135 Nm	MRT 100	15	90-4p	B5	F100M	B14B	F100S		
1.5 kW	93 rpm	1.3	120 Nm	MRT 70	30	90-2p	B14B	F70L	B14A	F70M		
1.5 kW	93 rpm	2	117 Nm	MRT 80	30	90-2p	B14B	F80M	B14A	F80S	B5	F80L
1.5 kW	93 rpm	3.4	121 Nm	MRT 100	30	90-2p	B5	F100M	B14B	F100S		
1.5 kW	112 rpm	1.5	114 Nm	MRT 70	12.5	90-4p	B14B	F70L	B14A	F70M		
1.5 kW	112 rpm	1.9	114 Nm	MRT 80	12.5	90-4p	B14B	F80M	B14A	F80S	B5	F80L
1.5 kW	112 rpm	3.8	115 Nm	MRT 100	12.5	90-4p	B5	F100M	B14B	F100S		
1.5 kW	112 rpm	1	102 Nm	MRT 60	25	90-2p	B14B	F60L	B14A	F60M		
1.5 kW	112 rpm	1.2	106 Nm	MRT 70	25	90-2p	B14B	F70L	B14A	F70M		
1.5 kW	112 rpm	1.7	107 Nm	MRT 80	25	90-2p	B14B	F80M	B14A	F80S	B5	F80L
1.5 kW	112 rpm	3.2	105 Nm	MRT 100	25	90-2p	B5	F100M	B14B	F100S		
1.5 kW	120 rpm	2	109 Nm	MRT 80	7.5	100-6p	B14A	F80M	B14B	F80L		
1.5 kW	120 rpm	3.3	107 Nm	MRT 100	7.5	100-6p	B14B	F100M	B14A	F100S	B5	F100L
1.5 kW	140 rpm	1.2	91 Nm	MRT 60	10	90-4p	B14B	F60L	B14A	F60M		
1.5 kW	140 rpm	1.7	93 Nm	MRT 70	10	90-4p	B14B	F70L	B14A	F70M		
1.5 kW	140 rpm	2	93 Nm	MRT 80	10	90-4p	B14B	F80M	B14A	F80S	B5	F80L
1.5 kW	140 rpm	3.8	91 Nm	MRT 100	10	90-4p	B5	F100M	B14B	F100S		
1.5 kW	140 rpm	1	86 Nm	MRT 60	20	90-2p	B14B	F60L	B14A	F60M		
1.5 kW	140 rpm	1.6	88 Nm	MRT 70	20	90-2p	B14B	F70L	B14A	F70M		
1.5 kW	140 rpm	2.2	89 Nm	MRT 80	20	90-2p	B14B	F80M	B14A	F80S	B5	F80L
1.5 kW	140 rpm	3.9	87 Nm	MRT 100	20	90-2p	B5	F100M	B14B	F100S		
1.5 kW	180 rpm	2.9	73 Nm	MRT 80	5	100-6p	B14A	F80M	B14B	F80L		
1.5 kW	187 rpm	1.7	68 Nm	MRT 60	7.5	90-4p	B14B	F60L	B14A	F60M		
1.5 kW	187 rpm	2.2	69 Nm	MRT 70	7.5	90-4p	B14B	F70L	B14A	F70M		
1.5 kW	187 rpm	2.7	71 Nm	MRT 80	7.5	90-4p	B14B	F80M	B14A	F80S	B5	F80L
1.5 kW	187 rpm	1.5	67 Nm	MRT 60	15	90-2p	B14B	F60L	B14A	F60M		
1.5 kW	187 rpm	2.2	68 Nm	MRT 70	15	90-2p	B14B	F70L	B14A	F70M		
1.5 kW	187 rpm	3.1	67 Nm	MRT 80	15	90-2p	B14B	F80M	B14A	F80S	B5	F80L
1.5 kW	224 rpm	1.6	56 Nm	MRT 60	12.5	90-2p	B14B	F60L	B14A	F60M		
1.5 kW	224 rpm	2.5	58 Nm	MRT 70	12.5	90-2p	B14B	F70L	B14A	F70M		
1.5 kW	224 rpm	3.1	58 Nm	MRT 80	12.5	90-2p	B14B	F80M	B14A	F80S	B5	F80L
1.5 kW	280 rpm	2.3	46 Nm	MRT 60	5	90-4p	B14B	F60L	B14A	F60M		
1.5 kW	280 rpm	3.1	47 Nm	MRT 70	5	90-4p	B14B	F70L	B14A	F70M		
1.5 kW	290 rpm	2	45 Nm	MRT 60	10	90-2p	B14B	F60L	B14A	F60M		
1.5 kW	373 rpm	2.8	35 Nm	MRT 60	7.5	90-2p	B14B	F60L	B14A	F60M		
1.5 kW	373 rpm	3.6	35 Nm	MRT 70	7.5	90-2p	B14B	F70L	B14A	F70M		
2.2 kW	9 rpm	1.4	1471 Nm	MRT 180	100	112-6p	B5	F180S				
2.2 kW	11 rpm	1.1	1195 Nm	MRT 150	80	112-6p	B14B	F150S	B5	F150M		
2.2 kW	11 rpm	1.7	1195 Nm	MRT 180	80	112-6p	B5	F180S				

							STANDARD		OPTIONAL			
OUTPUT	OUTPUT SPEED	SERVICE FACTOR	OUTPUT TORQUE	GEARBOX SIZE	RATIO i	MOTOR SIZE-POLES	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE
2.2 kW	14 rpm	1.1	960 Nm	MRT 150	100	100-4p	B14B	F150S	B5	F150M		
2.2 kW	14 rpm	1.9	960 Nm	MRT 180	100	100-4p	B5	F180S				
2.2 kW	15 rpm	1.4	994 Nm	MRT 150	60	112-6p	B14B	F150S	B5	F150M		
2.2 kW	15 rpm	2.5	938 Nm	MRT 180	60	112-6p	B5	F180S				
2.2 kW	18 rpm	1.6	780 Nm	MRT 150	80	100-4p	B14B	F150S	B5	F150M		
2.2 kW	18 rpm	2.4	780 Nm	MRT 180	80	100-4p	B5	F180S				
2.2 kW	18 rpm	1.6	899 Nm	MRT 150	50	112-6p	B14B	F150S	B5	F150M		
2.2 kW	18 rpm	2.8	840 Nm	MRT 180	50	112-6p	B5	F180S				
2.2 kW	23 rpm	1.1	585 Nm	MRT 120	60	100-4p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	23 rpm	1.9	648 Nm	MRT 150	60	100-4p	B14B	F150S	B5	F150M		
2.2 kW	23 rpm	3.4	612 Nm	MRT 180	60	100-4p	B5	F180S				
2.2 kW	23 rpm	1.2	682 Nm	MRT 120	40	112-6p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	23 rpm	2.3	728 Nm	MRT 150	40	112-6p	B14B	F150S	B5	F150M		
2.2 kW	23 rpm	3.4	719 Nm	MRT 180	40	112-6p	B5	F180S				
2.2 kW	28 rpm	1.2	540 Nm	MRT 120	50	100-4p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	28 rpm	2.2	585 Nm	MRT 150	50	100-4p	B14B	F150S	B5	F150M		
2.2 kW	28 rpm	3.8	548 Nm	MRT 180	50	100-4p	B5	F180S				
2.2 kW	30 rpm	1	539 Nm	MRT 100	30	112-6p	B14B	F100M	B14A	F100S	B5	F100L
2.2 kW	30 rpm	1.6	553 Nm	MRT 120	30	112-6p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	30 rpm	2.8	581 Nm	MRT 150	30	112-6p	B14B	F150S	B5	F150M		
2.2 kW	35 rpm	1	438 Nm	MRT 100	40	100-4p	B14B	F100M	B14A	F100S	B5	F100L
2.2 kW	35 rpm	1.7	444 Nm	MRT 120	40	100-4p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	35 rpm	3.2	474 Nm	MRT 150	40	100-4p	B14B	F150S	B5	F150M		
2.2 kW	35 rpm	1.2	414 Nm	MRT 120	80	90-2p	B5	F120M	B14B	F120S		
2.2 kW	36 rpm	1.4	484 Nm	MRT 120	25	112-6p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	36 rpm	2.4	479 Nm	MRT 150	25	112-6p	B14B	F150S	B5	F150M		
2.2 kW	36 rpm	4.2	484 Nm	MRT 180	25	112-6p	B5	F180S				
2.2 kW	45 rpm	1.1	388 Nm	MRT 100	20	112-6p	B14B	F100M	B14A	F100S	B5	F100L
2.2 kW	45 rpm	1.7	392 Nm	MRT 120	20	112-6p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	45 rpm	3.2	411 Nm	MRT 150	20	112-6p	B14B	F150S	B5	F150M		
2.2 kW	47 rpm	1.4	351 Nm	MRT 100	30	100-4p	B14B	F100M	B14A	F100S	B5	F100L
2.2 kW	47 rpm	2.2	360 Nm	MRT 120	30	100-4p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	47 rpm	3.9	378 Nm	MRT 150	30	100-4p	B14B	F150S	B5	F150M		
2.2 kW	47 rpm	1.2	293 Nm	MRT 100	60	90-2p	B5	F100M	B14B	F100S		
2.2 kW	47 rpm	1.9	297 Nm	MRT 120	60	90-2p	B5	F120M	B14B	F120S		
2.2 kW	56 rpm	1.3	304 Nm	MRT 100	25	100-4p	B14B	F100M	B14A	F100S	B5	F100L
2.2 kW	56 rpm	2	315 Nm	MRT 120	25	100-4p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	56 rpm	3.4	311 Nm	MRT 150	25	100-4p	B14B	F150S	B5	F150M		
2.2 kW	56 rpm	1.4	263 Nm	MRT 100	50	90-2p	B5	F100M	B14B	F100S		
2.2 kW	56 rpm	2.1	274 Nm	MRT 120	50	90-2p	B5	F120M	B14B	F120S		
2.2 kW	60 rpm	1.7	305 Nm	MRT 100	15	112-6p	B14B	F100M	B14A	F100S	B5	F100L
2.2 kW	60 rpm	2.6	308 Nm	MRT 120	15	112-6p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	60 rpm	4.1	308 Nm	MRT 150	15	112-6p	B14B	F150S	B5	F150M		
2.2 kW	70 rpm	1.6	252 Nm	MRT 100	20	100-4p	B14B	F100M	B14A	F100S	B5	F100L
2.2 kW	70 rpm	2.4	255 Nm	MRT 120	20	100-4p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	70 rpm	4.1	267 Nm	MRT 150	20	100-4p	B14B	F150S	B5	F150M		
2.2 kW	70 rpm	1	222 Nm	MRT 80	40	90-2p	B14B	F80M	B14A	F80S	B5	F80L
2.2 kW	70 rpm	1.8	222 Nm	MRT 100	40	90-2p	B5	F100M	B14B	F100S		
2.2 kW	70 rpm	2.8	225 Nm	MRT 120	40	90-2p	B5	F120M	B14B	F120S		
2.2 kW	72 rpm	1.8	260 Nm	MRT 100	12.5	112-6p	B14B	F100M	B14A	F100S	B5	F100L
2.2 kW	72 rpm	2.9	263 Nm	MRT 120	12.5	112-6p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	90 rpm	1	210 Nm	MRT 80	10	112-6p	B14A	F80M	B14B	F80L		
2.2 kW	90 rpm	1.9	205 Nm	MRT 100	10	112-6p	B14B	F100M	B14A	F100S	B5	F100L
2.2 kW	90 rpm	3.3	212 Nm	MRT 120	10	112-6p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	93 rpm	1.2	194 Nm	MRT 80	15	100-4p	B14A	F80M	B14B	F80L		
2.2 kW	93 rpm	2.3	198 Nm	MRT 100	15	100-4p	B14B	F100M	B14A	F100S	B5	F100L
2.2 kW	93 rpm	3.6	200 Nm	MRT 120	15	100-4p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	93 rpm	1.4	171 Nm	MRT 80	30	90-2p	B14B	F80M	B14A	F80S	B5	F80L
2.2 kW	93 rpm	2.3	178 Nm	MRT 100	30	90-2p	B5	F100M	B14B	F100S		
2.2 kW	93 rpm	3.7	182 Nm	MRT 120	30	90-2p	B5	F120M	B14B	F120S		
2.2 kW	112 rpm	1.3	167 Nm	MRT 80	12.5	100-4p	B14A	F80M	B14B	F80L		
2.2 kW	112 rpm	2.6	169 Nm	MRT 100	12.5	100-4p	B14B	F100M	B14A	F100S	B5	F100L
2.2 kW	112 rpm	4	171 Nm	MRT 120	12.5	100-4p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	112 rpm	1.1	158 Nm	MRT 80	25	90-2p	B14B	F80M	B14A	F80S	B5	F80L
2.2 kW	112 rpm	2.1	154 Nm	MRT 100	25	90-2p	B5	F100M	B14B	F100S		
2.2 kW	112 rpm	3.3	159 Nm	MRT 120	25	90-2p	B5	F120M	B14B	F120S		
2.2 kW	120 rpm	1.3	159 Nm	MRT 80	7.5	112-6p	B14A	F80M	B14B	F80L		
2.2 kW	120 rpm	2.2	158 Nm	MRT 100	7.5	112-6p	B14B	F100M	B14A	F100S	B5	F100L
2.2 kW	120 rpm	3.7	161 Nm	MRT 120	7.5	112-6p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	140 rpm	1.3	137 Nm	MRT 80	10	100-4p	B14A	F80M	B14B	F80L		
2.2 kW	140 rpm	2.6	134 Nm	MRT 100	10	100-4p	B14B	F100M	B14A	F100S	B5	F100L
2.2 kW	140 rpm	4.1	138 Nm	MRT 120	10	100-4p	B14B	F120M	B14A	F120S	B5	F120L
2.2 kW	140 rpm	1.1	129 Nm	MRT 70	20	90-2p	B14B	F70L	B14A	F70M		
2.2 kW	140 rpm	1.5	131 Nm	MRT 80	20	90-2p	B14B	F80M	B14A	F80S	B5	F80L
2.2 kW	140 rpm	2.6	128 Nm	MRT 100	20	90-2p	B5	F100M	B14B	F100S		
2.2 kW	140 rpm	4.1	129 Nm	MRT 120	20	90-2p	B5	F120M	B14B	F120S		
2.2 kW	180 rpm	1.9	107 Nm	MRT 80	5	112-6p	B14A	F80M	B14B	F80L		
2.2 kW	187 rpm	1.8	104 Nm	MRT 80	7.5	100-4p	B14A	F80M	B14B	F80L		
2.2 kW	187 rpm	3.1	102 Nm	MRT 100	7.5	100-4p	B14B	F100M	B14A	F100S	B5	F100L
2.2 kW	187 rpm	1	98 Nm	MRT 60	15	90-2p	B14B	F60L	B14A	F60M		
2.2 kW	187 rpm	1.5	99 Nm	MRT 70	15	90-2p	B14B	F70L	B14A	F70M		
2.2 kW	187 rpm	2.1	98 Nm	MRT 80	15	90-2p	B14B	F80M	B14A	F80S	B5	F80L

							STANDARD		OPTIONAL			
OUTPUT	OUTPUT SPEED	SERVICE FACTOR	OUTPUT TORQUE	GEARBOX SIZE	RATIO i	MOTOR SIZE-POLES	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE
2.2 kW	187 rpm	3.9	100 Nm	MRT 100	15	90-2p	B5	F100M	B14B	F100S		
2.2 kW	224 rpm	1.1	83 Nm	MRT 60	12.5	90-2p	B14B	F60L	B14A	F60M		
2.2 kW	224 rpm	1.7	84 Nm	MRT 70	12.5	90-2p	B14B	F70L	B14A	F70M		
2.2 kW	224 rpm	2.2	84 Nm	MRT 80	12.5	90-2p	B14B	F80M	B14A	F80S	B5	F80L
2.2 kW	280 rpm	2.7	70 Nm	MRT 80	5	100-4p	B14A	F80M	B14B	F80L		
2.2 kW	290 rpm	1.4	65 Nm	MRT 60	10	90-2p	B14B	F60L	B14A	F60M		
2.2 kW	290 rpm	2	67 Nm	MRT 70	10	90-2p	B14B	F70L	B14A	F70M		
2.2 kW	290 rpm	2.3	67 Nm	MRT 80	10	90-2p	B14B	F80M	B14A	F80S	B5	F80L
3 kW	9 rpm	1	2006 Nm	MRT 180	100	132-6p	B5	F180M				
3 kW	11 rpm	1.3	1630 Nm	MRT 180	80	132-6p	B5	F180M				
3 kW	14 rpm	1.4	1310 Nm	MRT 180	100	100-4p	B5	F180S				
3 kW	15 rpm	1	1356 Nm	MRT 150	60	132-6p	B14A	F150S	B5	F150L		
3 kW	15 rpm	1.8	1280 Nm	MRT 180	60	132-6p	B5	F180M				
3 kW	18 rpm	1.1	1064 Nm	MRT 150	80	100-4p	B14B	F150S	B5	F150M		
3 kW	18 rpm	1.7	1064 Nm	MRT 180	80	100-4p	B5	F180S				
3 kW	18 rpm	1.2	1226 Nm	MRT 150	50	132-6p	B14A	F150S	B5	F150L		
3 kW	18 rpm	2	1146 Nm	MRT 180	50	132-6p	B5	F180M				
3 kW	23 rpm	1.4	884 Nm	MRT 150	60	100-4p	B14B	F150S	B5	F150M		
3 kW	23 rpm	2.5	835 Nm	MRT 180	60	100-4p	B5	F180S				
3 kW	23 rpm	1.7	993 Nm	MRT 150	40	132-6p	B14A	F150S	B5	F150L		
3 kW	23 rpm	2.5	980 Nm	MRT 180	40	132-6p	B5	F180M				
3 kW	28 rpm	1.6	798 Nm	MRT 150	50	100-4p	B14B	F150S	B5	F150M		
3 kW	28 rpm	2.8	747 Nm	MRT 180	50	100-4p	B5	F180S				
3 kW	28 rpm	1.4	675 Nm	MRT 150	100	100-2p	B14B	F150S	B5	F150M		
3 kW	28 rpm	2.3	665 Nm	MRT 180	100	100-2p	B5	F180S				
3 kW	30 rpm	2	793 Nm	MRT 150	30	132-6p	B14A	F150S	B5	F150L		
3 kW	30 rpm	3.3	764 Nm	MRT 180	30	132-6p	B5	F180M				
3 kW	35 rpm	1.2	606 Nm	MRT 120	40	100-4p	B14B	F120M	B14A	F120S	B5	F120L
3 kW	35 rpm	2.3	647 Nm	MRT 150	40	100-4p	B14B	F150S	B5	F150M		
3 kW	35 rpm	3.4	638 Nm	MRT 180	40	100-4p	B5	F180S				
3 kW	35 rpm	1.9	540 Nm	MRT 150	80	100-2p	B14B	F150S	B5	F150M		
3 kW	35 rpm	2.9	540 Nm	MRT 180	80	100-2p	B5	F180S				
3 kW	36 rpm	1.8	653 Nm	MRT 150	25	132-6p	B14A	F150S	B5	F150L		
3 kW	36 rpm	3	661 Nm	MRT 180	25	132-6p	B5	F180M				
3 kW	45 rpm	2.4	560 Nm	MRT 150	20	132-6p	B14A	F150S	B5	F150L		
3 kW	45 rpm	4.1	554 Nm	MRT 180	20	132-6p	B5	F180M				
3 kW	47 rpm	1	479 Nm	MRT 100	30	100-4p	B14B	F100M	B14A	F100S	B5	F100L
3 kW	47 rpm	1.6	491 Nm	MRT 120	30	100-4p	B14B	F120M	B14A	F120S	B5	F120L
3 kW	47 rpm	2.8	516 Nm	MRT 150	30	100-4p	B14B	F150S	B5	F150M		
3 kW	47 rpm	4.1	497 Nm	MRT 180	30	100-4p	B5	F180S				
3 kW	47 rpm	1.4	405 Nm	MRT 120	60	100-2p	B14B	F120M	B14A	F120S	B5	F120L
3 kW	47 rpm	2.3	448 Nm	MRT 150	60	100-2p	B14B	F150S	B5	F150M		
3 kW	47 rpm	4.1	424 Nm	MRT 180	60	100-2p	B5	F180S				
3 kW	56 rpm	1.4	430 Nm	MRT 120	25	100-4p	B14B	F120M	B14A	F120S	B5	F120L
3 kW	56 rpm	2.5	425 Nm	MRT 150	25	100-4p	B14B	F150S	B5	F150M		
3 kW	56 rpm	4.1	430 Nm	MRT 180	25	100-4p	B5	F180S				
3 kW	56 rpm	1	358 Nm	MRT 100	50	100-2p	B14B	F100M	B14A	F100S	B5	F100L
3 kW	56 rpm	1.5	373 Nm	MRT 120	50	100-2p	B14B	F120M	B14A	F120S	B5	F120L
3 kW	56 rpm	2.7	404 Nm	MRT 150	50	100-2p	B14B	F150S	B5	F150M		
3 kW	60 rpm	3.2	420 Nm	MRT 150	15	132-6p	B14A	F150S	B5	F150L		
3 kW	70 rpm	1.1	344 Nm	MRT 100	20	100-4p	B14B	F100M	B14A	F100S	B5	F100L
3 kW	70 rpm	1.8	348 Nm	MRT 120	20	100-4p	B14B	F120M	B14A	F120S	B5	F120L
3 kW	70 rpm	3.3	364 Nm	MRT 150	20	100-4p	B14B	F150S	B5	F150M		
3 kW	70 rpm	1.3	303 Nm	MRT 100	40	100-2p	B14B	F100M	B14A	F100S	B5	F100L
3 kW	70 rpm	2	307 Nm	MRT 120	40	100-2p	B14B	F120M	B14A	F120S	B5	F120L
3 kW	70 rpm	3.9	327 Nm	MRT 150	40	100-2p	B14B	F150S	B5	F150M		
3 kW	72 rpm	3.8	358 Nm	MRT 150	12.5	132-6p	B14A	F150S	B5	F150L		
3 kW	90 rpm	4.1	287 Nm	MRT 150	10	132-6p	B14A	F150S	B5	F150L		
3 kW	93 rpm	1.7	270 Nm	MRT 100	15	100-4p	B14B	F100M	B14A	F100S	B5	F100L
3 kW	93 rpm	2.6	273 Nm	MRT 120	15	100-4p	B14B	F120M	B14A	F120S	B5	F120L
3 kW	93 rpm	4.1	273 Nm	MRT 150	15	100-4p	B14B	F150S	B5	F150M		
3 kW	93 rpm	1	233 Nm	MRT 80	30	100-2p	B14A	F80M	B14B	F80L		
3 kW	93 rpm	1.7	243 Nm	MRT 100	30	100-2p	B14B	F100M	B14A	F100S	B5	F100L
3 kW	93 rpm	2.7	249 Nm	MRT 120	30	100-2p	B14B	F120M	B14A	F120S	B5	F120L
3 kW	112 rpm	1.9	230 Nm	MRT 100	12.5	100-4p	B14B	F100M	B14A	F100S	B5	F100L
3 kW	112 rpm	2.9	233 Nm	MRT 120	12.5	100-4p	B14B	F120M	B14A	F120S	B5	F120L
3 kW	112 rpm	1.6	210 Nm	MRT 100	25	100-2p	B14B	F100M	B14A	F100S	B5	F100L
3 kW	112 rpm	2.4	217 Nm	MRT 120	25	100-2p	B14B	F120M	B14A	F120S	B5	F120L
3 kW	112 rpm	4.1	215 Nm	MRT 150	25	100-2p	B14B	F150S	B5	F150M		
3 kW	120 rpm	4.1	220 Nm	MRT 150	7.5	132-6p	B14A	F150S	B5	F150L		
3 kW	140 rpm	1	186 Nm	MRT 80	10	100-4p	B14A	F80M	B14B	F80L		
3 kW	140 rpm	1.9	182 Nm	MRT 100	10	100-4p	B14B	F100M	B14A	F100S	B5	F100L
3 kW	140 rpm	3.4	188 Nm	MRT 120	10	100-4p	B14B	F120M	B14A	F120S	B5	F120L
3 kW	140 rpm	1.1	178 Nm	MRT 80	20	100-2p	B14A	F80M	B14B	F80L		
3 kW	140 rpm	1.9	174 Nm	MRT 100	20	100-2p	B14B	F100M	B14A	F100S	B5	F100L
3 kW	140 rpm	3	176 Nm	MRT 120	20	100-2p	B14B	F120M	B14A	F120S	B5	F120L
3 kW	187 rpm	1.3	141 Nm	MRT 80	7.5	100-4p	B14A	F80M	B14B	F80L		
3 kW	187 rpm	2.2	140 Nm	MRT 100	7.5	100-4p	B14B	F100M	B14A	F100S	B5	F100L
3 kW	187 rpm	3.7	143 Nm	MRT 120	7.5	100-4p	B14B	F120M	B14A	F120S	B5	F120L
3 kW	187 rpm	1.5	134 Nm	MRT 80	15	100-2p	B14A	F80M	B14B	F80L		
3 kW	187 rpm	2.8	137 Nm	MRT 100	15	100-2p	B14B	F100M	B14A	F100S	B5	F100L
3 kW	224 rpm	1.6	115 Nm	MRT 80	12.5	100-2p	B14A	F80M	B14B	F80L		

							STANDARD		OPTIONAL			
OUTPUT	OUTPUT SPEED	SERVICE FACTOR	OUTPUT TORQUE	GEARBOX SIZE	RATIO i	MOTOR SIZE-POLES	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE
3 kW	224 rpm	3.1	116 Nm	MRT 100	12.5	100-2p	B14B	F100M	B14A	F100S	B5	F100L
3 kW	280 rpm	2	95 Nm	MRT 80	5	100-4p	B14A	F80M	B14B	F80L		
3 kW	290 rpm	1.7	91 Nm	MRT 80	10	100-2p	B14A	F80M	B14B	F80L		
3 kW	290 rpm	3.3	89 Nm	MRT 100	10	100-2p	B14B	F100M	B14A	F100S	B5	F100L
4 kW	14 rpm	1	1746 Nm	MRT 180	100	112-4p	B5	F180S				
4 kW	15 rpm	1.3	1706 Nm	MRT 180	60	132-6p	B5	F180M				
4 kW	18 rpm	1.3	1419 Nm	MRT 180	80	112-4p	B5	F180S				
4 kW	18 rpm	1.5	1528 Nm	MRT 180	50	132-6p	B5	F180M				
4 kW	23 rpm	1	1179 Nm	MRT 150	60	112-4p	B14B	F150S	B5	F150M		
4 kW	23 rpm	1.8	1113 Nm	MRT 180	60	112-4p	B5	F180S				
4 kW	23 rpm	1.2	1324 Nm	MRT 150	40	132-6p	B14A	F150S	B5	F150L		
4 kW	23 rpm	1.8	1307 Nm	MRT 180	40	132-6p	B5	F180M				
4 kW	28 rpm	1.2	1064 Nm	MRT 150	50	112-4p	B14B	F150S	B5	F150M		
4 kW	28 rpm	2.1	996 Nm	MRT 180	50	112-4p	B5	F180S				
4 kW	28 rpm	1	900 Nm	MRT 150	100	112-2p	B14B	F150S	B5	F150M		
4 kW	28 rpm	1.7	887 Nm	MRT 180	100	112-2p	B5	F180S				
4 kW	30 rpm	1.5	1057 Nm	MRT 150	30	132-6p	B14A	F150S	B5	F150L		
4 kW	30 rpm	2.4	1019 Nm	MRT 180	30	132-6p	B5	F180M				
4 kW	35 rpm	1.7	862 Nm	MRT 150	40	112-4p	B14B	F150S	B5	F150M		
4 kW	35 rpm	2.6	851 Nm	MRT 180	40	112-4p	B5	F180S				
4 kW	35 rpm	1.4	720 Nm	MRT 150	80	112-2p	B14B	F150S	B5	F150M		
4 kW	35 rpm	2.2	720 Nm	MRT 180	80	112-2p	B5	F180S				
4 kW	36 rpm	1.3	870 Nm	MRT 150	25	132-6p	B14A	F150S	B5	F150L		
4 kW	36 rpm	2.3	881 Nm	MRT 180	25	132-6p	B5	F180M				
4 kW	45 rpm	1.8	747 Nm	MRT 150	20	132-6p	B14A	F150S	B5	F150L		
4 kW	45 rpm	3	739 Nm	MRT 180	20	132-6p	B5	F180M				
4 kW	47 rpm	1.2	655 Nm	MRT 120	30	112-4p	B14B	F120M	B14A	F120S	B5	F120L
4 kW	47 rpm	2.1	688 Nm	MRT 150	30	112-4p	B14B	F150S	B5	F150M		
4 kW	47 rpm	3.4	663 Nm	MRT 180	30	112-4p	B5	F180S				
4 kW	47 rpm	1	540 Nm	MRT 120	60	112-2p	B14B	F120M	B14A	F120S	B5	F120L
4 kW	47 rpm	1.7	598 Nm	MRT 150	60	112-2p	B14B	F150S	B5	F150M		
4 kW	47 rpm	3.1	565 Nm	MRT 180	60	112-2p	B5	F180S				
4 kW	56 rpm	1	573 Nm	MRT 120	25	112-4p	B14B	F120M	B14A	F120S	B5	F120L
4 kW	56 rpm	1.8	566 Nm	MRT 150	25	112-4p	B14B	F150S	B5	F150M		
4 kW	56 rpm	3.1	573 Nm	MRT 180	25	112-4p	B5	F180S				
4 kW	56 rpm	1.1	498 Nm	MRT 120	50	112-2p	B14B	F120M	B14A	F120S	B5	F120L
4 kW	56 rpm	2	539 Nm	MRT 150	50	112-2p	B14B	F150S	B5	F150M		
4 kW	56 rpm	3.5	505 Nm	MRT 180	50	112-2p	B5	F180S				
4 kW	60 rpm	2.4	560 Nm	MRT 150	15	132-6p	B14A	F150S	B5	F150L		
4 kW	60 rpm	4	548 Nm	MRT 180	15	132-6p	B5	F180M				
4 kW	70 rpm	1.3	464 Nm	MRT 120	20	112-4p	B14B	F120M	B14A	F120S	B5	F120L
4 kW	70 rpm	2.4	486 Nm	MRT 150	20	112-4p	B14B	F150S	B5	F150M		
4 kW	70 rpm	4.1	480 Nm	MRT 180	20	112-4p	B5	F180S				
4 kW	70 rpm	1	404 Nm	MRT 100	40	112-2p	B14B	F100M	B14A	F100S	B5	F100L
4 kW	70 rpm	1.5	409 Nm	MRT 120	40	112-2p	B14B	F120M	B14A	F120S	B5	F120L
4 kW	70 rpm	2.9	437 Nm	MRT 150	40	112-2p	B14B	F150S	B5	F150M		
4 kW	72 rpm	2.8	478 Nm	MRT 150	12.5	132-6p	B14A	F150S	B5	F150L		
4 kW	72 rpm	4.1	472 Nm	MRT 180	12.5	132-6p	B5	F180M				
4 kW	90 rpm	3.2	382 Nm	MRT 150	10	132-6p	B14A	F150S	B5	F150L		
4 kW	93 rpm	1.2	360 Nm	MRT 100	15	112-4p	B14B	F100M	B14A	F100S	B5	F100L
4 kW	93 rpm	1.9	364 Nm	MRT 120	15	112-4p	B14B	F120M	B14A	F120S	B5	F120L
4 kW	93 rpm	3.3	364 Nm	MRT 150	15	112-4p	B14B	F150S	B5	F150M		
4 kW	93 rpm	1.3	323 Nm	MRT 100	30	112-2p	B14B	F100M	B14A	F100S	B5	F100L
4 kW	93 rpm	2	332 Nm	MRT 120	30	112-2p	B14B	F120M	B14A	F120S	B5	F120L
4 kW	93 rpm	3.5	348 Nm	MRT 150	30	112-2p	B14B	F150S	B5	F150M		
4 kW	112 rpm	1.4	307 Nm	MRT 100	12.5	112-4p	B14B	F100M	B14A	F100S	B5	F100L
4 kW	112 rpm	2.2	310 Nm	MRT 120	12.5	112-4p	B14B	F120M	B14A	F120S	B5	F120L
4 kW	112 rpm	3.9	310 Nm	MRT 150	12.5	112-4p	B14B	F150S	B5	F150M		
4 kW	112 rpm	1.2	280 Nm	MRT 100	25	112-2p	B14B	F100M	B14A	F100S	B5	F100L
4 kW	112 rpm	1.8	290 Nm	MRT 120	25	112-2p	B14B	F120M	B14A	F120S	B5	F120L
4 kW	112 rpm	3.1	287 Nm	MRT 150	25	112-2p	B14B	F150S	B5	F150M		
4 kW	120 rpm	4	293 Nm	MRT 150	7.5	132-6p	B14A	F150S	B5	F150L		
4 kW	140 rpm	1.4	243 Nm	MRT 100	10	112-4p	B14B	F100M	B14A	F100S	B5	F100L
4 kW	140 rpm	2.5	251 Nm	MRT 120	10	112-4p	B14B	F120M	B14A	F120S	B5	F120L
4 kW	140 rpm	4.1	248 Nm	MRT 150	10	112-4p	B14B	F150S	B5	F150M		
4 kW	140 rpm	1.4	232 Nm	MRT 100	20	112-2p	B14B	F100M	B14A	F100S	B5	F100L
4 kW	140 rpm	2.2	235 Nm	MRT 120	20	112-2p	B14B	F120M	B14A	F120S	B5	F120L
4 kW	140 rpm	4.1	246 Nm	MRT 150	20	112-2p	B14B	F150S	B5	F150M		
4 kW	187 rpm	1.7	186 Nm	MRT 100	7.5	112-4p	B14B	F100M	B14A	F100S	B5	F100L
4 kW	187 rpm	2.8	190 Nm	MRT 120	7.5	112-4p	B14B	F120M	B14A	F120S	B5	F120L
4 kW	187 rpm	2.1	182 Nm	MRT 100	15	112-2p	B14B	F100M	B14A	F100S	B5	F100L
4 kW	187 rpm	3.2	184 Nm	MRT 120	15	112-2p	B14B	F120M	B14A	F120S	B5	F120L
5.5 kW	15 rpm	1	2346 Nm	MRT 180	60	132-6p	B5	F180M				
5.5 kW	18 rpm	1.1	2101 Nm	MRT 180	50	132-6p	B5	F180M				
5.5 kW	23 rpm	1.3	1531 Nm	MRT 180	60	132-4p	B5	F180M				
5.5 kW	23 rpm	1.3	1798 Nm	MRT 180	40	132-6p	B5	F180M				
5.5 kW	28 rpm	1.5	1369 Nm	MRT 180	50	132-4p	B5	F180M				
5.5 kW	30 rpm	1.1	1453 Nm	MRT 150	30	132-6p	B14A	F150S	B5	F150L		
5.5 kW	30 rpm	1.8	1401 Nm	MRT 180	30	132-6p	B5	F180M				
5.5 kW	35 rpm	1.2	1186 Nm	MRT 150	40	132-4p	B14A	F150S	B5	F150L		
5.5 kW	35 rpm	1.8	1171 Nm	MRT 180	40	132-4p	B5	F180M				
5.5 kW	36 rpm	1.6	1211 Nm	MRT 180	25	132-6p	B5	F180M				

							STANDARD		OPTIONAL			
OUTPUT	OUTPUT SPEED	SERVICE FACTOR	OUTPUT TORQUE	GEARBOX SIZE	RATIO i	MOTOR SIZE-POLES	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE	MOTOR FLANGE	GEARBOX FLANGE
5.5 kW	45 rpm	1.3	1027 Nm	MRT 150	20	132-6p	B14A	F150S	B5	F150L		
5.5 kW	45 rpm	2.2	1015 Nm	MRT 180	20	132-6p	B5	F180M				
5.5 kW	47 rpm	1.5	945 Nm	MRT 150	30	132-4p	B14A	F150S	B5	F150L		
5.5 kW	47 rpm	2.4	912 Nm	MRT 180	30	132-4p	B5	F180M				
5.5 kW	56 rpm	1.3	778 Nm	MRT 150	25	132-4p	B14A	F150S	B5	F150L		
5.5 kW	56 rpm	2.3	788 Nm	MRT 180	25	132-4p	B5	F180M				
5.5 kW	60 rpm	1.7	770 Nm	MRT 150	15	132-6p	B14A	F150S	B5	F150L		
5.5 kW	60 rpm	2.9	753 Nm	MRT 180	15	132-6p	B5	F180M				
5.5 kW	70 rpm	1.8	668 Nm	MRT 150	20	132-4p	B14A	F150S	B5	F150L		
5.5 kW	70 rpm	3	660 Nm	MRT 180	20	132-4p	B5	F180M				
5.5 kW	72 rpm	2	657 Nm	MRT 150	12.5	132-6p	B14A	F150S	B5	F150L		
5.5 kW	72 rpm	3.2	649 Nm	MRT 180	12.5	132-6p	B5	F180M				
5.5 kW	90 rpm	2.3	525 Nm	MRT 150	10	132-6p	B14A	F150S	B5	F150L		
5.5 kW	90 rpm	3.9	525 Nm	MRT 180	10	132-6p	B5	F180M				
5.5 kW	93 rpm	2.4	501 Nm	MRT 150	15	132-4p	B14A	F150S	B5	F150L		
5.5 kW	93 rpm	4	490 Nm	MRT 180	15	132-4p	B5	F180M				
5.5 kW	112 rpm	2.8	427 Nm	MRT 150	12.5	132-4p	B14A	F150S	B5	F150L		
5.5 kW	112 rpm	4.1	422 Nm	MRT 180	12.5	132-4p	B5	F180M				
5.5 kW	120 rpm	2.9	403 Nm	MRT 150	7.5	132-6p	B14A	F150S	B5	F150L		
5.5 kW	120 rpm	4.6	403 Nm	MRT 180	7.5	132-6p	B5	F180M				
5.5 kW	140 rpm	3.2	341 Nm	MRT 150	10	132-4p	B14A	F150S	B5	F150L		
5.5 kW	140 rpm	4.1	341 Nm	MRT 180	10	132-4p	B5	F180M				
5.5 kW	187 rpm	4	262 Nm	MRT 150	7.5	132-4p	B14A	F150S	B5	F150L		
5.5 kW	187 rpm	4.1	262 Nm	MRT 180	7.5	132-4p	B5	F180M				
7.5 kW	23 rpm	1	2087 Nm	MRT 180	60	132-4p	B5	F180M				
7.5 kW	23 rpm	1	2451 Nm	MRT 180	40	160-6p	B5	F180L				
7.5 kW	28 rpm	1.1	1867 Nm	MRT 180	50	132-4p	B5	F180M				
7.5 kW	30 rpm	1.3	1910 Nm	MRT 180	30	160-6p	B5	F180L				
7.5 kW	35 rpm	1.3	1596 Nm	MRT 180	40	132-4p	B5	F180M				
7.5 kW	36 rpm	1.2	1651 Nm	MRT 180	25	160-6p	B5	F180L				
7.5 kW	45 rpm	1.6	1385 Nm	MRT 180	20	160-6p	B5	F180L				
7.5 kW	47 rpm	1.1	1289 Nm	MRT 150	30	132-4p	B14A	F150S	B5	F150L		
7.5 kW	47 rpm	1.8	1243 Nm	MRT 180	30	132-4p	B5	F180M				
7.5 kW	56 rpm	1	1062 Nm	MRT 150	25	132-4p	B14A	F150S	B5	F150L		
7.5 kW	56 rpm	1.6	1074 Nm	MRT 180	25	132-4p	B5	F180M				
7.5 kW	60 rpm	2.1	1027 Nm	MRT 180	15	160-6p	B5	F180L				
7.5 kW	70 rpm	1.3	911 Nm	MRT 150	20	132-4p	B14A	F150S	B5	F150L		
7.5 kW	70 rpm	2.2	900 Nm	MRT 180	20	132-4p	B5	F180M				
7.5 kW	72 rpm	2.3	885 Nm	MRT 180	12.5	160-6p	B5	F180L				
7.5 kW	90 rpm	2.9	716 Nm	MRT 180	10	160-6p	B5	F180L				
7.5 kW	93 rpm	1.7	683 Nm	MRT 150	15	132-4p	B14A	F150S	B5	F150L		
7.5 kW	93 rpm	2.9	668 Nm	MRT 180	15	132-4p	B5	F180M				
7.5 kW	112 rpm	2.1	582 Nm	MRT 150	12.5	132-4p	B14A	F150S	B5	F150L		
7.5 kW	112 rpm	3.2	576 Nm	MRT 180	12.5	132-4p	B5	F180M				
7.5 kW	120 rpm	3.4	549 Nm	MRT 180	7.5	160-6p	B5	F180L				
7.5 kW	140 rpm	2.4	466 Nm	MRT 150	10	132-4p	B14A	F150S	B5	F150L		
7.5 kW	140 rpm	3.9	466 Nm	MRT 180	10	132-4p	B5	F180M				
7.5 kW	187 rpm	2.9	357 Nm	MRT 150	7.5	132-4p	B14A	F150S	B5	F150L		
7.5 kW	187 rpm	4.7	357 Nm	MRT 180	7.5	132-4p	B5	F180M				
11 kW	45 rpm	1.1	2031 Nm	MRT 180	20	160-6p	B5	F180L				
11 kW	47 rpm	1.2	1823 Nm	MRT 180	30	160-4p	B5	F180L				
11 kW	56 rpm	1.1	1576 Nm	MRT 180	25	160-4p	B5	F180L				
11 kW	60 rpm	1.4	1506 Nm	MRT 180	15	160-6p	B5	F180L				
11 kW	70 rpm	1.5	1321 Nm	MRT 180	20	160-4p	B5	F180L				
11 kW	72 rpm	1.6	1299 Nm	MRT 180	12.5	160-6p	B5	F180L				
11 kW	90 rpm	1.9	1051 Nm	MRT 180	10	160-6p	B5	F180L				
11 kW	93 rpm	2	979 Nm	MRT 180	15	160-4p	B5	F180L				
11 kW	112 rpm	2.2	844 Nm	MRT 180	12.5	160-4p	B5	F180L				
11 kW	120 rpm	2.3	805 Nm	MRT 180	7.5	160-6p	B5	F180L				
11 kW	140 rpm	2.7	683 Nm	MRT 180	10	160-4p	B5	F180L				
11 kW	187 rpm	3.2	523 Nm	MRT 180	7.5	160-4p	B5	F180L				
15 kW	70 rpm	1.1	1801 Nm	MRT 180	20	160-4p	B5	F180L				
15 kW	93 rpm	1.4	1335 Nm	MRT 180	15	160-4p	B5	F180L				
15 kW	112 rpm	1.6	1151 Nm	MRT 180	12.5	160-4p	B5	F180L				
15 kW	140 rpm	1.9	931 Nm	MRT 180	10	160-4p	B5	F180L				
15 kW	187 rpm	2.3	714 Nm	MRT 180	7.5	160-4p	B5	F180L				